

STANLEY®
Engineered Fastening



Service Manual



PB2500 Smart Blind rivet tool
Battery Power Tool

STANLEY®
Assembly Technologies

PB2500 Smart (Ref. Section 2.4)

Figure 1

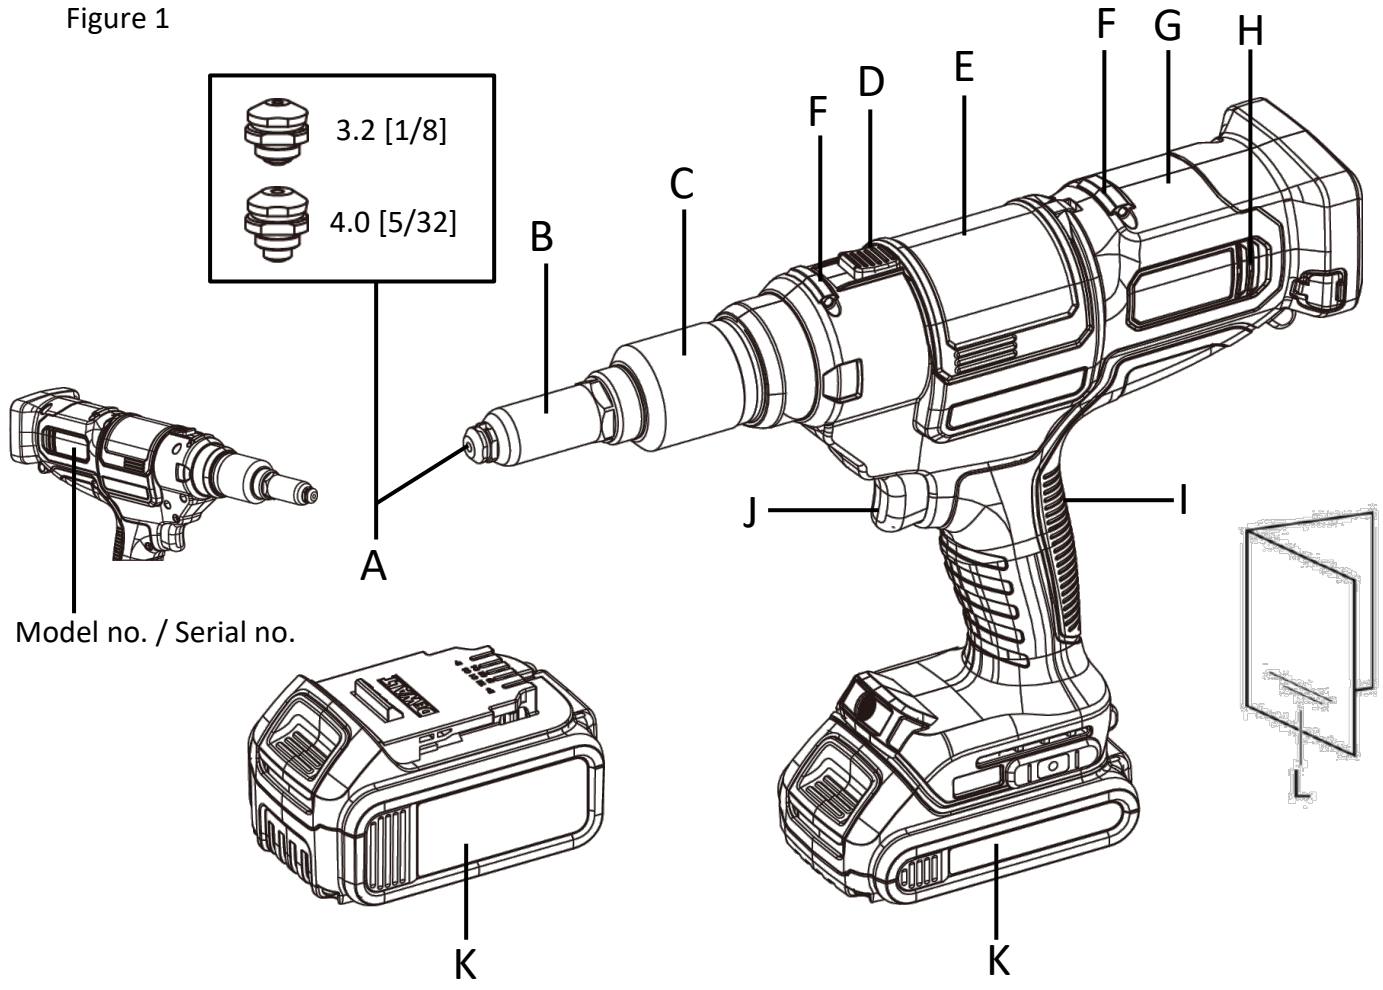


Figure 2


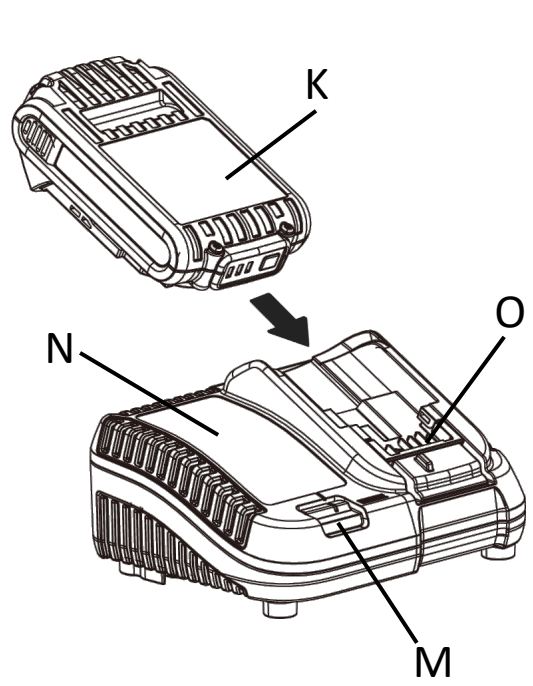


Figure 3

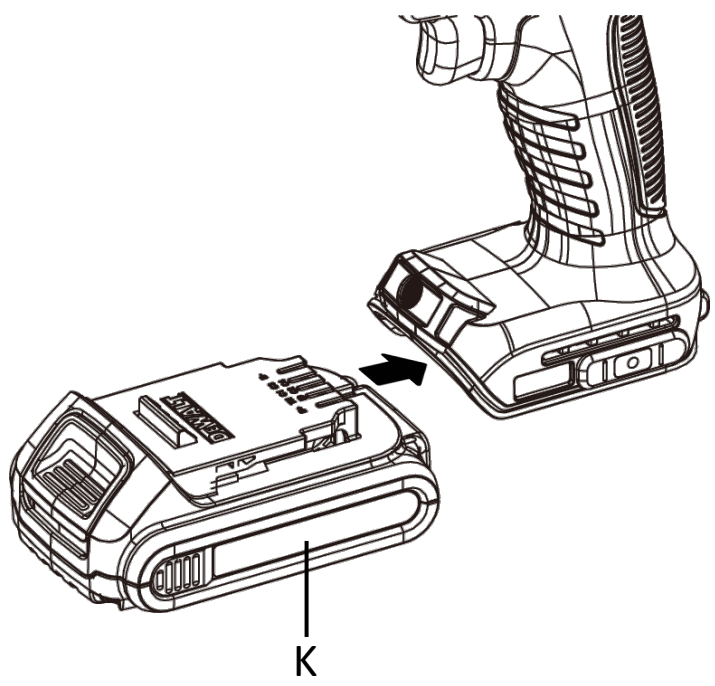

PB2500 Smart (Ref. Section 2.4)

Figure 4

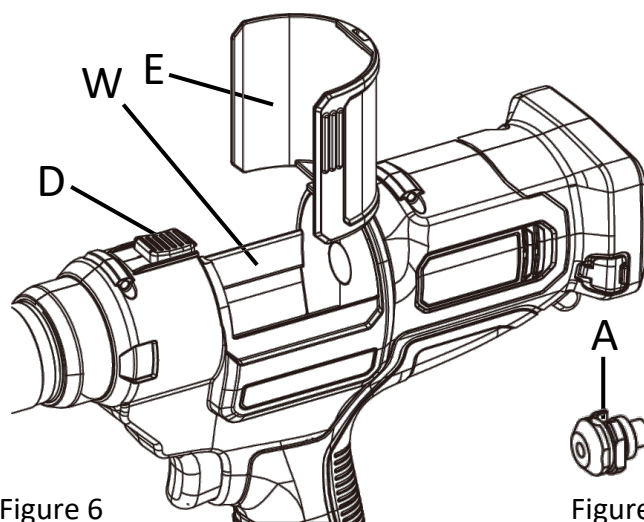
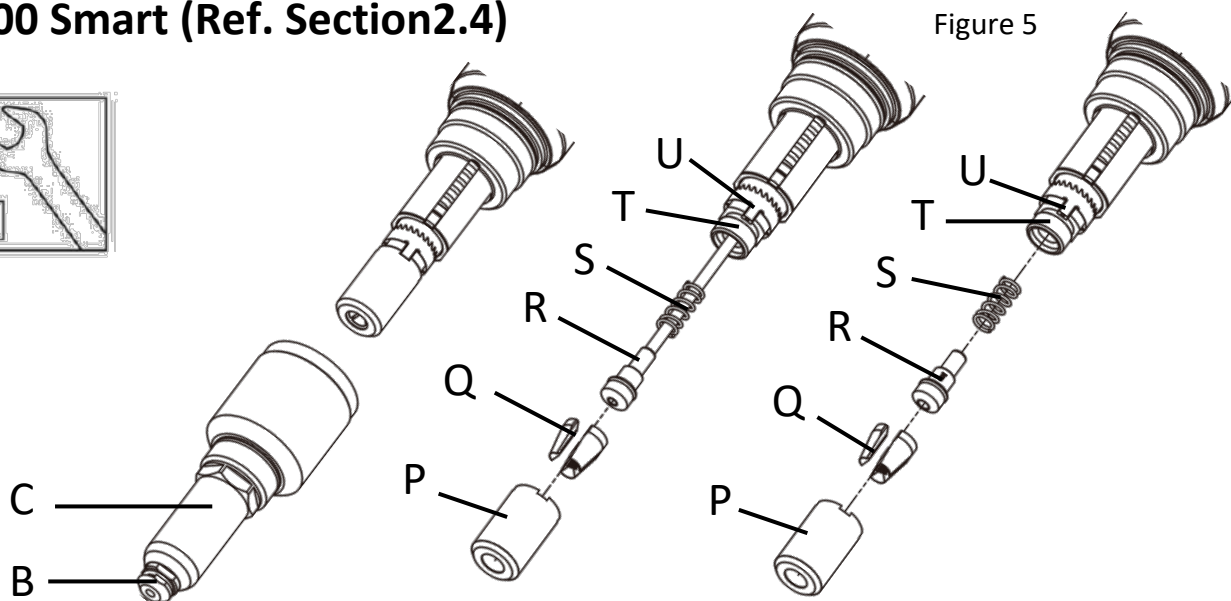



Figure 6

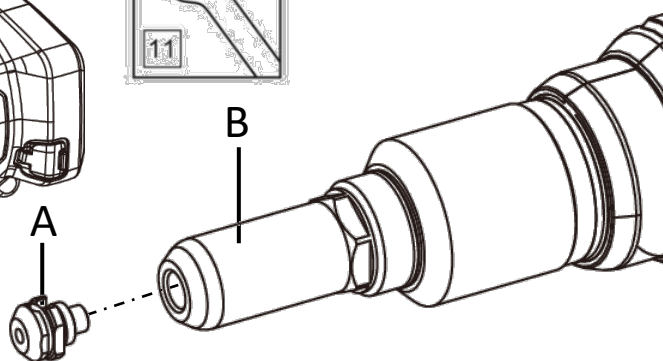



Figure 7

Figure 8

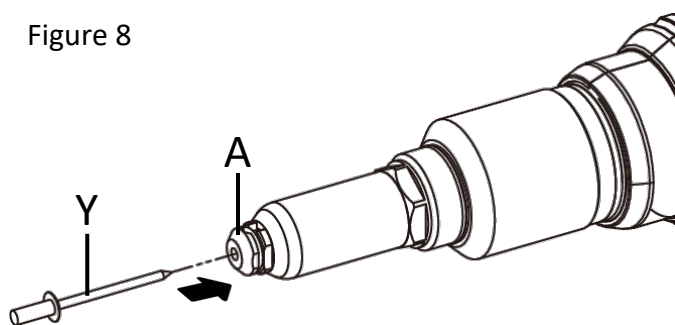


Figure 10


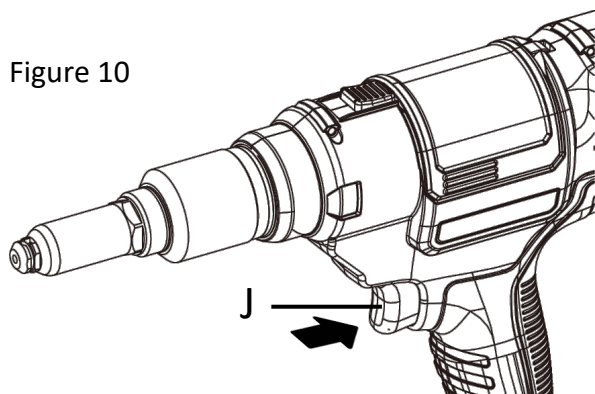


Figure 9

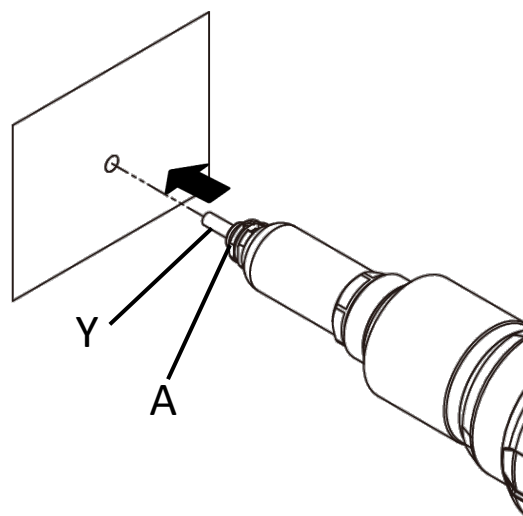

©2020 Stanley Black & Decker

All rights reserved.

The information provided may not be reproduced and/or made public in any way and through any means (electronically or mechanically) without prior explicit and written permission from STANLEY Engineered Fastening. The information provided is based on the data known at the moment of the introduction of this product. STANLEY Engineered Fastening pursues a policy of continuous product improvement and therefore the products may be subject to change. The information provided is applicable to the product as delivered by STANLEY Engineered Fastening. Therefore, STANLEY Engineered Fastening cannot be held liable for any damage resulting from deviations from the original specifications of the product.

The information available has been composed with the utmost care. However, STANLEY Engineered Fastening will not accept any liability with respect to any faults in the information nor for the consequences thereof. STANLEY Engineered Fastening will not accept any liability for damage resulting from activities carried out by third parties. The working names, trade names, registered trademarks, etc. used by STANLEY Engineered Fastening should not be considered as being free, pursuant to the legislation with respect to the protection of trade marks.

CONTENT

Note: Drawings referring to the PB2500 Smart are on the Fold out of the Front Cover

1. SAFETY DEFINITIONS	6
1.1 GENERAL SAFETY	6
1.2 POWER TOOL USE AND CARE	6
1.3 IMPORTANT SAFETY INSTRUCTIONS FOR ALL BATTERY CHARGERS	7
1.4 IMPORTANT SAFETY INSTRUCTIONS FOR ALL BATTERY PACKS	8
1.5 SPECIFIC SAFETY INSTRUCTIONS FOR LITHIUM-ION (LI-ION)	9
1.6 RESIDUAL RISKS	9
1.7 LABELS AND ICONS	9
2. SPECIFICATIONS	10
2.1 TECHNICAL DATA	10
2.2 PLACING SPECIFICATIONS	12
2.3 PACKAGE CONTENTS	12
2.4 MAIN COMPONENTS LIST	13
2.5 OPTIONAL ACCESSORIES	13
3. TOOL USE & SET UP	14
4. OPERATING INSTRUCTIONS	14
4.1 NOSE EQUIPMENT	14
4.2 CHARGERS	15
4.3 BATTERY PACKS	16
5. OPERATING PROCEDURE	16
5.1 PROPER HAND POSITION	16
5.2 TOOL OPERATION	17
6. SERVICING THE TOOL	18
6.1 MAINTENANCE FREQUENCY	18
6.2 CLEANING	18
6.3 SPARE PARTS – TOOLS	19
6.4 RECHARGEABLE BATTERY PACK	19
6.5 PROTECTING THE ENVIRONMENT	19
7. Jaws, Jaw Guide, Jaw Pusher and Jaw Pusher Spring	20
8. SA Nose Housing and SA Nose Piece	24
9. Operation Test and Appearance check	26
10. Restoring to factory settings	27
11. Default settings	28
12. Accessories	28
13. Exploded View	31
14. BOM	32
15. Troubleshooting Guide	39



This instruction manual must be read by any person installing or operating this tool with particular attention to the following safety rules.

1. SAFETY DEFINITIONS

The definitions below describe the level of severity for each signal word. Please read the manual and pay attention to these symbols.



DANGER: Indicates an imminently hazardous situation which, if not avoided, **will** result in **death or serious injury**.



CAUTION: Indicates a potentially hazardous situation which, if not avoided, **may** result in **minor or moderate injury**.



WARNING: Indicates a potentially hazardous situation which, if not avoided, **could** result in **death or serious injury**.

NOTICE: Indicates a practice **not related to personal injury** which, if not avoided, **may** result in **property damage**.



Denotes risk of electric shock



Denotes risk of fire

Improper operation or maintenance of this product could result in serious injury and property damage. Read and understand all warnings and operating instructions before using this equipment. When using power tools, basic safety precautions must always be followed to reduce the risk of personal injury.

1.1 GENERAL SAFETY



WARNING! Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

SAVE ALL WARNINGS AND INSTRUCTIONS FOR FUTURE REFERENCE

The term “power tool” in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

- Do not use outside the design intent of Placing STANLEY Engineered Fastening Blind Fasteners.
- Use only parts, fasteners, and accessories recommended by the manufacturer.
- Use Power Tool only with specifically designated battery packs.

1.2 POWER TOOL USE AND CARE

- The tool must be maintained in a safe working condition at all times and examined at regular intervals for damage and function by trained personnel. Any dismantling procedure will be undertaken only by trained personnel. Do not dismantle this tool without prior reference to the maintenance instructions.
- Do not modify the tool in any way. Any modification to the tool is undertaken by the customer and will be the customer’s entire responsibility and void any applicable warranties.
- Disconnect the battery from the tool before performing any maintenance, attempting to adjust, fit or remove a nose assembly.
- Prior to use, check for misalignment or binding of moving parts, breakage of parts, and any other condition that affects the tool’s operation. If damaged, have the tool serviced before using. Remove any adjusting key or wrench before use.
- Prior to use, inspect battery for damage. Do not drop battery. A sharp impact may cause internal damage and lead to premature battery failure.
- Keep work area clean and well lit.

- Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.
- Adopt a firm footing or a stable position before operating the tool.
- Operators and others in work area must wear ANSI Z87.1 CAN/CSA Z94.3 or other approved safety glasses with side shields. Always wear safety glasses and ear protection during operation.
- Adequate clearance is required for the tool operator's hands before proceeding.
- Do not operate a tool that is directed towards any person(s).
- DO NOT operate tool with the nose housing removed.
- Do not operate the tool or the charger in an explosive atmosphere or environment allowing exposure to combustible fluids or gasses.
- Do not operate the tool or the charger in an environment allowing exposure to moisture or rain to avoid risk of electric shock.
- Do not abuse the tool by dropping or using it as a hammer.
- Keep dirt and foreign matter out of the air vents of the tool as this will cause the tool to malfunction.
- Keep tool handles dry, clean, and free from oil and grease.
- When carrying the tool from place to place keep hands away from the trigger to avoid inadvertent activation.
- Never leave installation tool unattended.
- Disconnect battery when tool is not in use.

1.3 IMPORTANT SAFETY INSTRUCTIONS FOR ALL BATTERY CHARGERS

SAVE THESE INSTRUCTIONS: This manual contains important safety and operating instructions for compatible battery chargers (refer to Technical Data).

- Before using charger, read all instructions and cautionary markings on charger, battery pack, and product using battery pack.



WARNING: Shock hazard. Do not allow any liquid to get inside charger. Electric shock may result.



WARNING: We recommend the use of a residual current device with a residual current rating of 30mA or less.



CAUTION: Burn hazard. To reduce the risk of injury, charge only DEWALT® rechargeable batteries. Other types of batteries may burst causing personal injury and damage.



CAUTION: Children should be supervised to ensure that they do not play with the appliance.

NOTICE: Under certain conditions, with the charger plugged into the power supply, the exposed charging contacts inside the charger can be shorted by foreign material. Foreign materials of a conductive nature such as, but not limited to, steel wool, aluminium foil or any build-up of metallic particles should be kept away from charger cavities. Always unplug the charger from the power supply when there is no battery pack in the cavity. Unplug charger before attempting to clean

- DO NOT attempt to charge the battery pack with any chargers other than the ones in this manual. The charger and battery pack are specifically designed to work together.
- These chargers are not intended for any uses other than charging DEWALT® rechargeable batteries. Any other uses may result in risk of fire, electric shock or electrocution.
- Do not expose charger to rain or snow.
- Pull by plug rather than cord when disconnecting charger. This will reduce risk of damage to electric plug and cord.
- Make sure that cord is located so that it will not be stepped on, tripped over, or otherwise subjected to damage or stress.
- Do not use an extension cord unless it is absolutely necessary. Use of improper extension cord could result in risk of fire, electric shock, or electrocution.

- *Do not place any object on top of charger or place the charger on a soft surface that might block the ventilation slots and result in excessive internal heat. Place the charger in a position away from any heat source. The charger is ventilated through slots in the top and the bottom of the housing.*
- *Do not operate charger with damaged cord or plug—have them replaced immediately.*
- *Do not operate charger if it has received a sharp blow, been dropped, or otherwise damaged in any way. Take it to an authorised service centre.*
- *Do not disassemble charger; take it to an authorised service centre when service or repair is required. Incorrect reassembly may result in a risk of electric shock, electrocution or fire.*
- *Disconnect the charger from the outlet before attempting any cleaning. This will reduce the risk of electric shock. Removing the battery pack will not reduce this risk.*
- *NEVER attempt to connect two chargers together.*
- *The charger is designed to operate on standard household electrical power (refer to charger specifications). Do not attempt to use it on any other voltage. This does not apply to the vehicular charger.*

1.4 IMPORTANT SAFETY INSTRUCTIONS FOR ALL BATTERY PACKS

When ordering replacement battery packs, be sure to include catalog number and voltage.

The battery pack is not fully charged out of the carton. Before using the battery pack and charger, read the safety instructions below. Then follow charging procedures outlined.

READ ALL INSTRUCTIONS

- *Do not charge or use battery in explosive atmospheres, such as in the presence of flammable liquids, gases or dust. Inserting or removing the battery from the charger may ignite the dust or fumes.*
- *Never force battery pack into charger. Do not modify battery pack in any way to fit into a non-compatible charger as battery pack may rupture causing serious personal injury.*
- *Charge the battery packs only in DEWALT®.*
- *DO NOT splash or immerse in water or other liquids.*
- *Do not store or use the tool and battery pack in locations where the temperature may reach or exceed 40 °C (104 °F) (such as outside sheds or metal buildings in summer).*
- *When battery pack is not in use, keep it away from other metal objects like paper clips, coins, keys, nails, screws or other small metal objects that can make a connection from one terminal to another.*
- *Do not discard batteries into water.*



WARNING: Never attempt to open the battery pack for any reason. If battery pack case is cracked or damaged, do not insert into charger. Do not crush, drop or damage battery pack. Do not use a battery pack or charger that has received a sharp blow, been dropped, run over or damaged in any way (i.e., pierced with a nail, hit with a hammer, stepped on). Electric shock or electrocution may result. Damaged battery packs should be returned to service centre for recycling.



WARNING: Fire hazard. Do not store or carry the battery pack so that metal objects can contact exposed battery terminals. When transporting individual battery packs, make sure that the battery terminals are protected and well insulated from materials that could contact them and cause a short circuit.



CAUTION: When not in use, place tool on its side on a stable surface where it will not cause a tripping or falling hazard. Some tools with large battery packs will stand upright on the battery pack but may be easily knocked over.

1.5 SPECIFIC SAFETY INSTRUCTIONS FOR LITHIUM-ION (LI-ION)

1. **Do not incinerate the battery pack even if it is severely damaged or is completely worn out.** The battery pack can explode in a fire. Toxic fumes and materials are created when lithium-ion battery packs are burned.
2. **If battery contents come into contact with the skin, immediately wash area with mild soap and water.** If battery liquid gets into the eye, rinse water over the open eye for 15 minutes or until irritation ceases. If medical attention is needed, the battery electrolyte is composed of a mixture of liquid organic carbonates and lithium salts.
3. **Contents of opened battery cells may cause respiratory irritation.** Provide fresh air. If symptoms persists, seek medical attention.



WARNING: Burn hazard. Battery liquid may be flammable if exposed to spark or flame.

1.6 RESIDUAL RISKS

In spite of the application of the relevant safety regulations and the implementation of safety devices, certain residual risks cannot be avoided. These are:

- Impairment of hearing
- Risk of personal injury due flying particles
- Risk of burns due to accessories becoming hot during operation.
- Risk of personal injury due to prolonged use.

1.7 LABELS AND ICONS



Markings on Tool

DATE CODE POSITION: The Date Code, which includes the year, month and location of manufacture, is printed into the housing surface that forms the mounting joint between tool and battery.

Labels on charger and battery pack

In addition to the pictographs used in this manual, the labels on the charger and the battery pack show the following pictographs.

	Read instruction manual before use.		Do not expose to water.
	Read instruction manual before use.		Have defective cords replaced immediately.
	Battery charging.		Charge only between 4 °C and 40 °C.
	Battery charged.		Discard the battery pack with due care for the environment.
	Hot/cold pack delay.		Do not incinerate the battery pack.
	Charges Li-ion battery packs.		See Technical Data for charging time.
	Only for indoor use.		Do not charge damaged battery packs.

	Charge DEWALT®/POP®Avdel® battery packs only with designated DEWALT®/POP®Avdel® chargers. Charging battery packs other than the designated DEWALT®/POP®Avdel® batteries with a DEWALT®/POP®Avdel® charger may make them burst or lead to other dangerous situations.		Your DEWALT® charger is double insulated in accordance with EN60335; therefore no earth wire is required.
---	--	---	---

STANLEY Engineered Fastening policy
is one of continuous product development and improvement
and we reserve the right to change the specification
of any product without prior notice.

2. SPECIFICATIONS

UNDER NO CIRCUMSTANCES SHOULD ANY MAINTENANCE OR SERVICING BE CONDUCTED APART FROM NOSE EQUIPMENT CHANGE.

2.1 TECHNICAL DATA

2.1.1.

		PB2500 Smart
Voltage	V	18 nom / 20 max
Type		3
Battery Type		Li-ion
Weight (without battery pack)	Kg	1.46
Lpa (sound pressure)	dB(A)	76.1
Kpa (sound pressure uncertainty)	dB(A)	3
Lwa (sound power)	dB(A)	87.1
Kwa (sound power uncertainty)	dB(A)	3

Vibration total values (triax vector sum) determined according to EN 60745-1 and EN 62841-1:

Vibration emission value ah

Ah = m/s² < 2.5

Uncertainty K = m/s² 1.5

2.1.2.

Model		PB2500 Smart 2.0 Ah	PB2500 Smart 4.0 Ah
Weight	Kg [lbs]	1.8 [3.98]	2.1 [4.64]
Length	mm [in]	341 [13.4]	341 [13.4]
Height	mm [in]	241 [9.5]	261 [10.3]
Stroke	mm [in]	25 [0.984]	25 [0.984]
Pulling Force	N [lbf]	8,500 [1911]	8,500 [1911]
Rivet Range	nom.dia mm [in]	ø 2,4 [3/32"] thru ø 4,8 [3/16"]	

2.1.3.

Battery Pack*				
Battery type	Li-ion			
Voltage	V _{DC}	18 nom / 20 max		
Capacity	Ah	2.0/4.0		
Weight	Kg	0.35/0.61		
Charging duration**	min	30/60		
Charger**		NA	JP	QW/GB/XE/XD/KR
Battery type		Li-ion	Li-ion	Li-ion
Battery type Mains voltage	V _{AC}	120	100	230
Input frequency	Hz	60	50/60	50
Weight	Kg	0.50	0.50	0.50
Fuses				
Europe	230 V tools	10 Amperes. Mains		
U.K. & Ireland	230 V tools	3 Amperes . in plugs		

*PB Series tools are compatible with DEWALT® 18V nom/20V max Li-Ion slide type batteries

** Charging duration is based on the DCB115 DEWALT® Charging units

2.1.4.

Estimated Rivets prr Charge			
	Nom. Rivet Dia. mm [in]	Battery 2.0Ah	Battery 4.0Ah
PB2500 Smart	ø 2,4 [3/32]	1,600(1,200)	3,200(2,400)
	ø 3,2 [1/8]	1,500(1,100)	3,000(2,200)
	ø 4,0 [5/32]	1,300(1,000)	2,600(2,000)
	ø 4,8 [3/16]	1,100(800)	2,200(1,600)

Note: These values are listed as a guide only and are estimates based on a fully charged battery. Results may vary depending on rivet material, tool/battery condition and work environment. The values in parentheses show the number when Smart function was enabled.

2.2 PLACING SPECIFICATIONS

Rivet Type	PLACING CAPACITY						
	PB2500 Smart						
	2.4mm [3/32"]	3.0mm	3.2mm [1/8"]	4.0mm [5/32"]	4.3mm	4.8mm [3/16"]	5.0/6.0/ 7.0mm
OPEN END	●	●	●	●		●	
CLOSED END			●	●		●	
AVEX®/ STAVEX®		●	●	●		●	
AVINOX®/ AVIBULB®			●	●		●	
HR/HT			●	●		●	
INTERLOCK®						●	
HEMLOK®							
KLAMP-TITE®/ KTR						●	
BULBEX®/LS/TL			●	●		●	
MONOBOLT®						●	
MULTI-GRIP			●	●		●	
PULL-THRU (PT)		●					
Q RIVET			●	●		●	
T-LOK®					●		
T Rivet						●	
AVSEAL® II				●			●

Note: For details on the nose equipment please refer to the accessories manual.

This tool has the capability to verify measurements. STANLEY Engineered Fastening does not assure the value and accuracy of Break-load and Stroke displayed. In addition, STANLEY Engineered Fastening cannot provide the range of Break-load and Stroke for each rivet. The limits must be set by the tool operator as a means to prevent the release of defective products, abnormal fastening or to detect abnormalities of the tool. Examples of tool abnormalities include jaw slip or the requirement to return the tool for maintenance.

Rivets with a low breaking load (less than 3,000N such as an Aluminum rivet 4.0mm size etc.) may not show the rivet curve correctly. If the rivet curve and assessment are not required or the rivet curve does not show correctly, only the counter function can be used.

Rivets with extremely low load (less than 2,000N such as Aluminum rivet 3.2mm etc) the counter display will not function correctly.

2.3 PACKAGE CONTENTS

This package contains:

PB2500S-#####	Qty
Battery Pack	**
Charger	**
SA Nosepiece, 4	1pc
SA Nosepiece, 5	1pc
Jaw Pusher Assembly, 4	1pc
Jaw Pusher Assembly, 5	1pc
Instruction Manual	1pc

*The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold. Contact your local reseller for details and options.

**If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

2.4 MAIN COMPONENTS LIST (for complete tool explosion and Bill of Material please see service manual)

PB2500 Smart drawing can be found inside the **front cover**

A	Nose pieces	M	Changer lamp
B	Nose housing	N	Charger
C	Nose housing nut	O	Battery charger connection
D	Collector lock	P	Jaw guide
E	Collector shutter	Q	Jaws
F	Hook accessory attachment	R	Jaw pusher assembly
G	Motor housing	S	Jaw pusher spring
H	Exhaust vent	T	Pulling head
I	Handle	U	Front clutch
J	Switch	W	Collector space
K	Battery pack	Y	Rivet
L	Manual		

2.5 OPTIONAL ACCESSORIES



WARNING: Since accessories, other than those offered by STANLEY Engineered Fastening have not been tested with this product, use of such accessories with this tool could be hazardous. To reduce the risk of injury, only STANLEY Engineered Fastening recommended accessories should be used with this product. Consult your dealer for further information on the appropriate accessories.



WARNING: To reduce the risk of serious personal injury, disconnect battery pack before making any adjustments or removing/installing attachments or accessories.

For a complete list of nose equipment and other accessories available for the PB Series, please visit our website <http://www.stanleyengineeredfastening.com/resource-center/document-library>

3. TOOL USE & SET UP

The PB Series of tools are designed for installation of STANLEY Engineered Fastening Blind Fasteners.

DO NOT use under wet conditions or in presence of flammable liquids or gases.



READ ALL SAFETY WARNINGS AND INSTRUCTIONS BEFORE PUTTING TOOL INTO SERVICE.

Electrical Safety

The electric motor has been designed for one voltage only. Always check that the battery pack voltage corresponds to the voltage on the rating plate. Also make sure that the voltage of your charger corresponds to that of your mains.



Your *DEWALT*® charger is double insulated in accordance with EN60335; therefore no earth wire is required.

Using an Extension Cable

An extension cord should not be used unless absolutely necessary. Use an approved extension cable suitable for the power input of your charger (see Technical Data). The minimum conductor size is 1 mm²; the maximum length is 30 m.

When using a cable reel, always unwind the cable completely.

Before Use

- Select relevant size nose equipment and install
- Ensure that the battery is fully charged
- Insert Battery Pack into the tool
- Pull trigger once to turn on the power of the screen
- Quickly pull and release the trigger to set the tool to the home position.

4. OPERATING INSTRUCTIONS



Always wear approved hearing and eye protections at all times when using installation equipment.



WARNING: Before adjusting tool, always remove the battery pack.

4.1 NOSE EQUIPMENT

PB2500 Smart drawing can be found inside the **front cover**

Mounting the nosepiece (fig. 7).

- Select the correct nosepiece for the rivet to be installed. Reference the Accessories Manual for appropriate nose equipment.
- Tighten the nosepiece (A) into the nose housing (B) by turning it clockwise using 11 mm spanner.

Mounting the jaw pusher and tail guide PB2500 Smart (fig. 4 & 5)

- Select the correct jaw pusher or jaw pusher assembly (R) that matches the Nosepiece selected. Reference the Accessories Manual for appropriate nose equipment.
- Insert jaw pusher (R) into jaw pusher spring (S).
- Reassemble jaw set (Q) and jaw guide (P) onto front clutch (U)

NOTE: Do NOT use spanners to mount jaw guide (P) onto front clutch (U). Manual tightening of Jaw guide (P) is enough to lock onto front clutch (U)

4.2 CHARGERS

Your tool uses a DEWALT® charger. Be sure to read all safety instructions before using your charger. The charger requires no adjustment and is designed to be as easy as possible to operate.










Charging Procedure (fig. 2)

- Plug the charger into an appropriate outlet before inserting the battery pack. (Refer to the Charger Specifications in Section 2)
- Insert the battery pack (K) into the charger, making sure the pack is fully seated in the charger. The red (charging) light will blink continuously indicating that the charging-process has started.
- The completion of charge will be indicated by the red light remaining ON continuously. The pack is fully charged and may be used at this time or left in the charger.

NOTE: To ensure maximum performance and life of Li-Ion battery packs, charge the battery pack fully before first use.

Charging Process

Refer to the table below for the state of charge of the battery pack.

Charge indicators:			
	charging		
	fully charged		
	hot/cold pack delay*		

*The red light will continue to blink, but a yellow indicator light will be illuminated during this operation. Once the battery has reached an appropriate temperature, the yellow light will turn off and the charger will resume the charging procedure.

This charger will not charge a faulty battery pack. The charger will indicate faulty battery by refusing to light.

NOTE: This could also mean a problem with a charger.

If the charger indicates a problem, take the charger and battery pack to be tested at an authorised service centre.

Hot/Cold Pack Delay

When the charger detects a battery that is too hot or too cold, it automatically starts a hot/cold pack delay, suspending charging until the battery has reached an appropriate temperature. The charger then automatically switches to the pack charging mode. This feature ensures maximum battery life. A cold battery pack will charge at about half the rate of a warm battery pack. The battery pack will charge at that slower rate throughout the entire charging cycle and will not return to maximum charge rate even if the battery warms.

Lithium-Ion Battery Packs

STANLEY Engineered Fastening PB Series Li-Ion tools are designed with an Electronic Protection System that will protect the battery against overloading, overheating or deep discharge.

The tool will automatically turn off if the Electronic Protection System engages. If this occurs, place the Li-Ion battery on the charger until it is fully charged.

4.3 BATTERY PACKS

Your tool is designed to work specifically with DEWALT® 18V/20V max Li-Ion battery packs.

Inserting and Removing the Battery Pack from the Tool (fig. 3)

NOTE: For best results, make sure your battery pack is fully charged. The tool will shut off without warning when the battery is fully discharged.

TO INSTALL THE BATTERY PACK INTO THE HANDLE

- Align the battery pack (K) with the rails inside the tool's handle (fig. 3).
- Slide it into the handle until the battery pack is firmly seated in the tool and ensure that it does not disengage.

TO REMOVE THE BATTERY PACK FROM THE HANDLE

- Press battery release button and firmly pull the battery pack out of the tool handle.
- Insert battery pack into the charger as described in the charger section for this manual.

Storage Recommendations

- The best storage place is one that is cool and dry away from direct sunlight and excess heat or cold. For optimum battery performance and life, store battery packs at room temperature when not in use.
- For long storage, it is recommended to store a fully charged battery pack in a cool, dry place out of the charger for optimal results.

NOTE: Battery packs should not be stored completely depleted of charge. The battery pack will need to be recharged before use.

5. OPERATING PROCEDURE



WARNING: Always observe the safety instructions and applicable regulations.



WARNING: To reduce the risk of serious personal injury, disconnect battery pack before making any adjustments or removing/installing attachments or accessories.



WARNING: To reduce the risk of serious personal injury, ALWAYS use proper hand position.



WARNING: To reduce the risk of serious personal injury, ALWAYS hold securely in anticipation of a sudden reaction

5.1 PROPER HAND POSITION

Proper hand position requires one hand on the main handle (I) fig. 1.

5.2 TOOL OPERATION

Installing a blind rivet (fig. 8)

Read a Smart Touch Screen Operating Manual to know the details of how to use the touch screen. Please visit our website <http://www.stanleyengineeredfastening.com/resource-center/document-library>

To install a blind rivet

- Place the blind rivet (Y) in the nosepiece (A)
- Position the tool (fig.9)
- Pull and hold the switch (J) until the rivet is fully set in the application (fig. 10).
- When the blind rivet (Y) has been set completely, release the switch (J). The tool will return to its initial position automatically. The mandrel is automatically dropped into the mandrel collector (W).

If you release the switch (J) before the end of the setting stroke, the tool will immediately return to its initial position. If the blind rivet (Y) has not been set completely, repeat the previous steps.

In case Auto return mode was enabled, once the tool detects a rivet setting, it will return to its initial position automatically even if the trigger remains holding.

Reset function (fig.9)

If the tool does not move to its initial position after releasing the switch or stops during the setting stroke, reset the tool to home by quickly pulling and releasing the switch (J). If this does not resolve the issue, remove the battery, re-insert and then repeat the prior step. If the issue persists, contact your local service representative.

Emptying the mandrel collector (W) (fig. 6)

The mandrel collector is used to collect the waste mandrels. The mandrel collector must be emptied depending on the size of the blind rivets used.

Nom. Rivet Dia.	Approx. Capacity (PB2500 Smart)
2.4 mm [3/32"]	600
3.2 mm [1/8"]	360
4.0 mm [5/32"]	200
4.8 mm [3/16"]	150
6.4 mm [1/4"]	Not applicable

- Tilt the tool back to allow all waste mandrels to fall into the mandrel collector.
- Open the mandrel collector (W) by sliding the Collector Lock (D) towards the nose housing nut (C) and raise the cover (E).
- Empty the waste mandrels into an appropriate recycling container or waste bin
- To close the mandrel collector (W), lower the cover (E) until the Collector Lock (D) clicks into place.

6. SERVICING THE TOOL

6.1 MAINTENANCE FREQUENCY

Item	Frequency
General Tool Inspection	Daily
Clean & lubricate Nose Equipment	5,000 rivets
Clean & grease Ball Screw and Thrust Bearing	50,000 rivets*
*Recommend contacting authorized service centre	

6.2 CLEANING



ALWAYS wear approved eye protection at all times when cleaning equipment

Tool Exterior

Keep the brushless motor exhaust vent openings (H) free from dust and dirt. If necessary, use a soft, moist cloth to remove dust and dirt from the exhaust vents. Blow dirt and dust out of the main power tool housing with dry air as often as dirt is seen collecting in and around the exhaust vents (H).



WARNING: Wear approved eye protection and approved dust mask when performing this procedure.



WARNING: Never use solvents or other harsh chemicals for cleaning the non-metallic parts of the tool. These chemicals may weaken the materials used in these parts. Use a cloth dampened only with water and mild soap. Never let any liquid get inside the tool; never immerse any part of the tool into a liquid.

Cleaning the Nose Equipment (fig. 4 & 5)

- Loosen the nose housing nut (C). Remove the nose housing (B).
- Press the front clutch (U) and loosen the jaw guide (P). Release the front clutch (U).
- Remove the jaws (Q) and the jaw pusher (R).
- Remove the spring (S)
- Clean the inside of the nose housing (B) using a dry cloth.
- Clean the jaws (Q) and the jaw pusher (R) using a dry cloth. If necessary, replace the jaws (Q) and the jaw pusher (R).
- Clean the pulling head (T) using a dry cloth.
- Apply grease to the inside of the jaw guide (P) where the jaws (Q) make contact. A Molybdenum Disulfide based grease is recommended.
- Mount the spring (S)
- Mount the jaw pusher(R) and the jaws (Q)
- Press front clutch (U) and tighten the jaw guide (P). Release front clutch (U).
- Mount the nose housing (B). Tighten the nose housing nut (C).
- Perform tool reset function to ensure the tool is at the initial home position as described in section 5.2

Charger Cleaning Instructions



WARNING: Shock hazard. Disconnect the charger from the AC outlet before cleaning.

Dirt and grease may be removed from the exterior of the charger using a cloth or soft non-metallic brush. **DO NOT** use water or any cleaning solutions.

6.3 SPARE PARTS – TOOLS

For spare parts we refer you to the specific service manuals which you can find on our website at <http://www.stanleyengineeredfastening.com/resource-center/document-library>

6.4 RECHARGEABLE BATTERY PACK

This long life battery pack must be recharged when it fails to produce sufficient power on jobs which were easily done before. At the end of its technical life, discard it with due care for our environment:

- Run the battery pack down completely, then remove it from the tool.
- Li-Ion cells are recyclable. Take them to your dealer or a local recycling station. The collected battery packs will be recycled or disposed of properly.

6.5 PROTECTING THE ENVIRONMENT

Separate collection. This product must not be disposed of with normal household waste.




Should you find one day that your STANLEY Engineered Fastening product needs replacement, or if it is of no further use to you, do not dispose of it with household waste. Make this product available for separate collection. Separate collection of used products and packaging allows materials to be recycled and used again. Re-use of recycled materials helps prevent environmental pollution and reduces the demand for raw materials.



Local regulations may provide for separate collection of electrical products from the household, at municipal waste sites or by the retailer when you purchase a new product.

You can check the location of your nearest authorised repair agent by contacting your local STANLEY Engineered Fastening office at the address indicated in this manual. Alternatively, a list of authorised STANLEY Engineered Fastening repair agents and full details of our after-sales service and contacts are available on the Internet at: **www.StanleyEngineeredFastening.com**

7. Jaws, Jaw Guide, Jaw Pusher and Jaw Pusher Spring

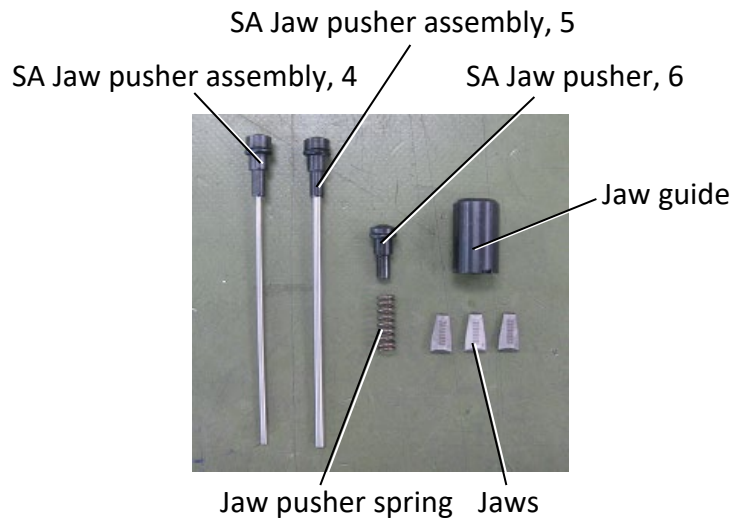


BOM for Main Unit Assembly


Model	JP	Others	Qty	Remarks
JAWS	13300	71210-15001	1	
JAW GUIDE	PRS2500-01	←	1	
SA JAW PUSHER, 6	TP124-549	TP154-500	1	On Tool
JAW PUSHER ASSEMBLY, 5	TP124-548	TP154-505	1	In Kit box
JAW PUSHER ASSEMBLY, 4	TP124-635	TP154-502	1	In Kit box
JAW PUSHER SPRING	TP114-652	←	1	

Apply grease to the inside of the Jaw Guide.


Grease recommended:
Molybdenum disulfide grease

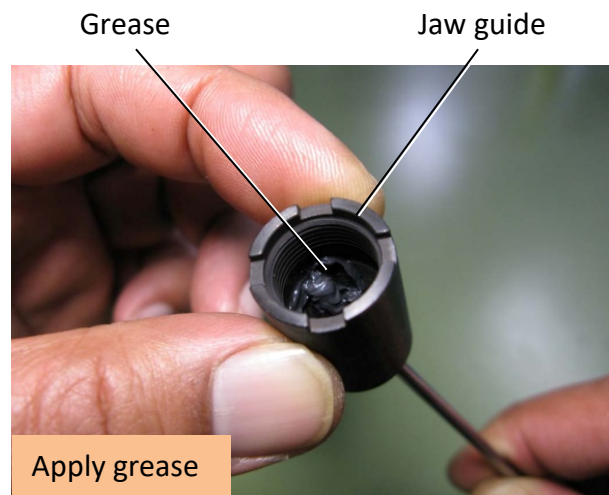


Put Jaws into Jaw guide as shown, so that the teeth of Jaws are inside.

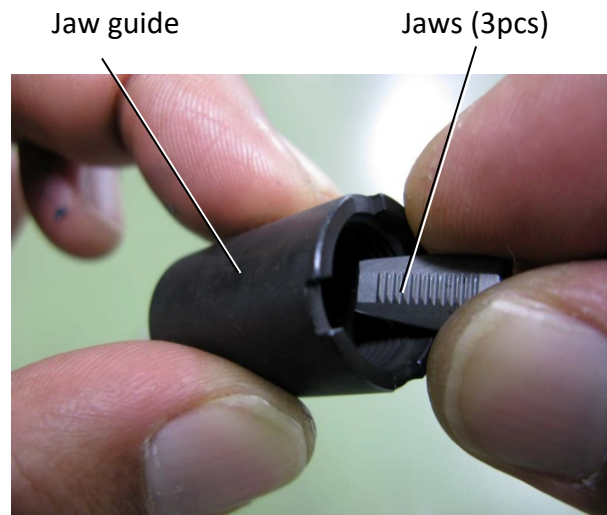


After putting Jaws, check that they are set correctly as shown.

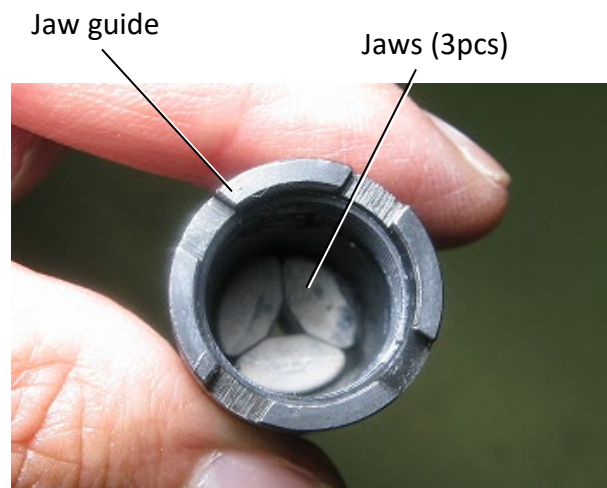


Press insert Jaw pusher into Jaw pusher spring by Hand.
Check if the Jaw pusher spring does not drop off from Jaw pusher after inserting.

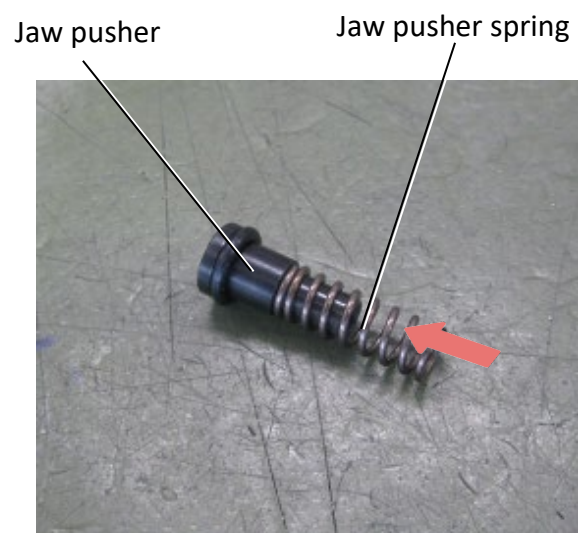


Put Jaw pusher with Jaw pusher spring into Pulling head.

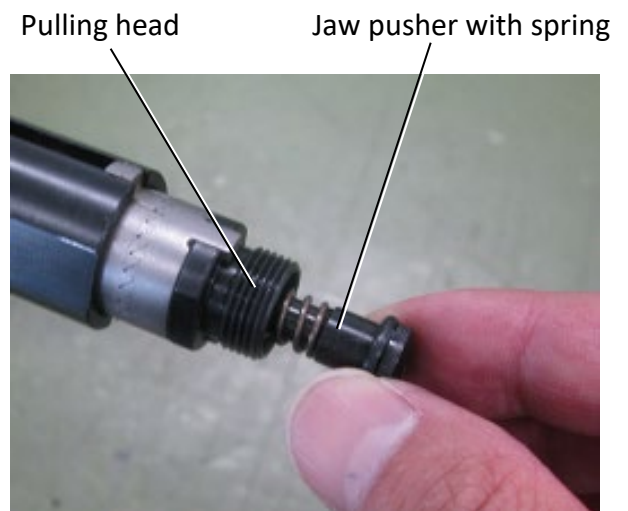

Tighten Jaw guide with Jaws to Pulling head while Front clutch is pulled by hand until it stops.

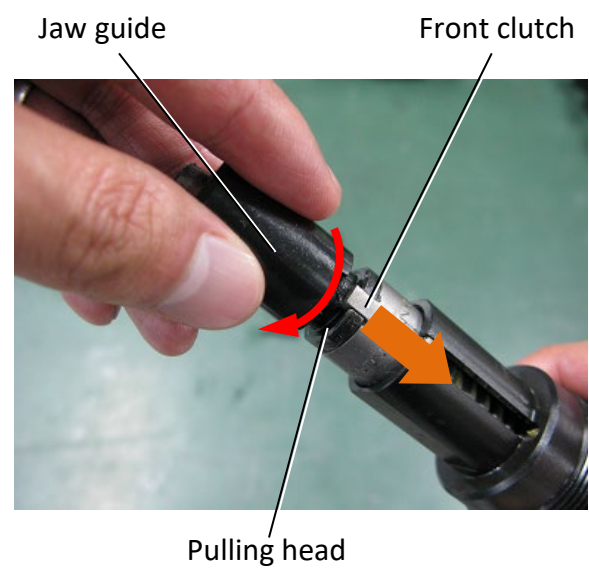

Turn back a little until the rotation is locked by the boss of Front clutch.

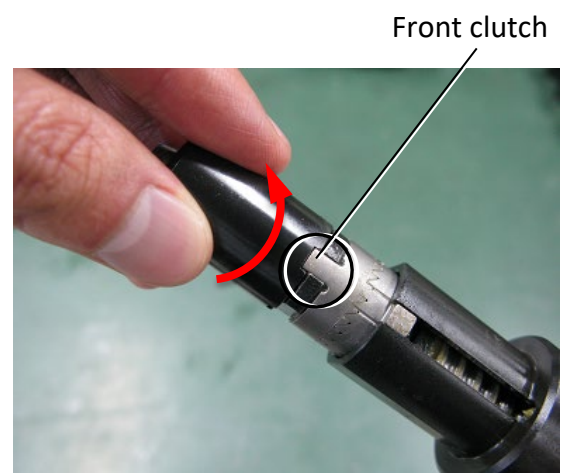

Set a battery onto Tool to check the operation.




Check if the tool operates correctly by pulling and releasing the trigger.

Check for:


- Pulling operation
- Return operation
- Reset operation
- Full stroke → Stroke end clutch operation → Return to home position → Front end clutch operation



Remove the battery after checking by pushing Latch.

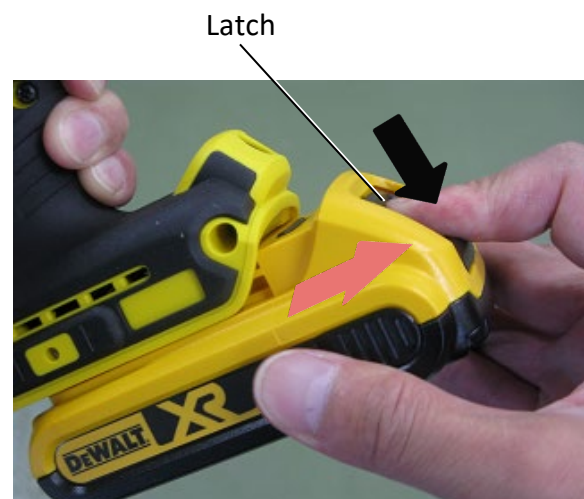


8. SA Nose Housing and SA Nose Piece

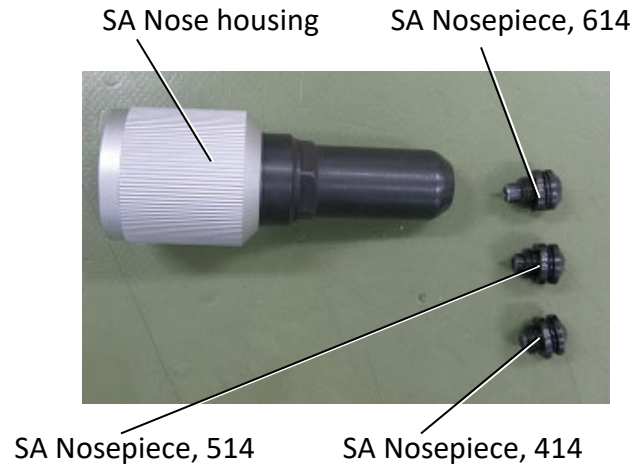

BOM

SA NOSE HOUSING	TP133-570	1	
SA NOSEPIECE, 614	TRM00825	1	On Tool
SA NOSEPIECE, 514	TRM00824	1	In Kit box
SA NOSEPIECE, 414	TRM00823	1	In Kit box


Screw SA Nosepiece onto SA Nose housing by hand until it stops.

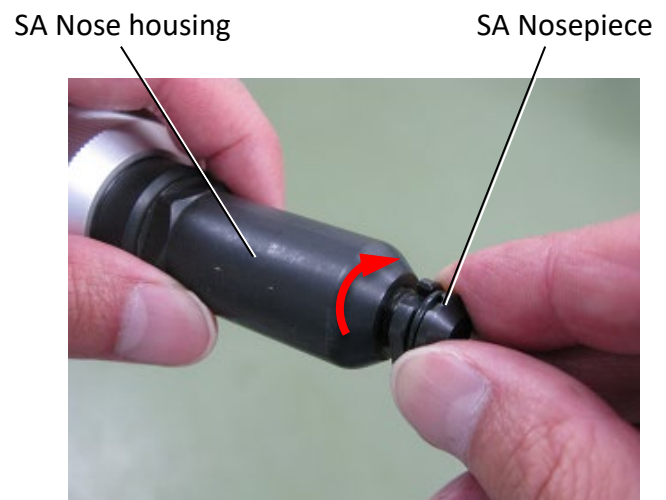

Tighten up SA Nosepiece securely with spanners as shown.

Width across flats : 12mm and 21mm


Set Torque: 13Nm

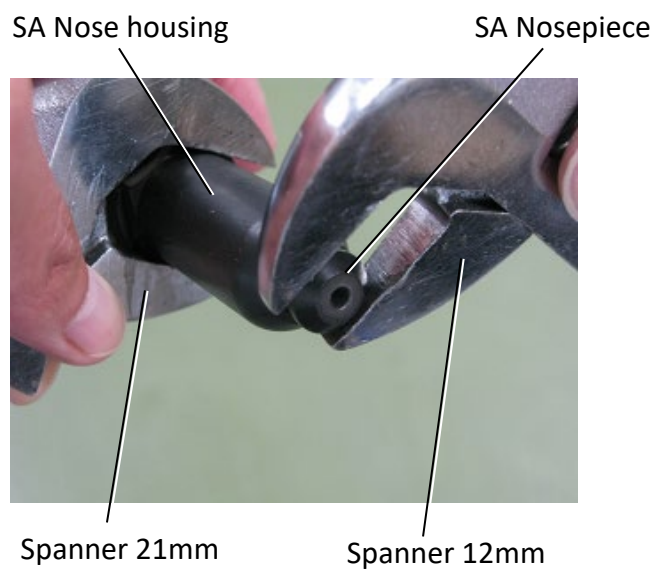


Apply grease to inside of Nose housing nut.



Insert SA Nose housing onto Mast housing on the tool

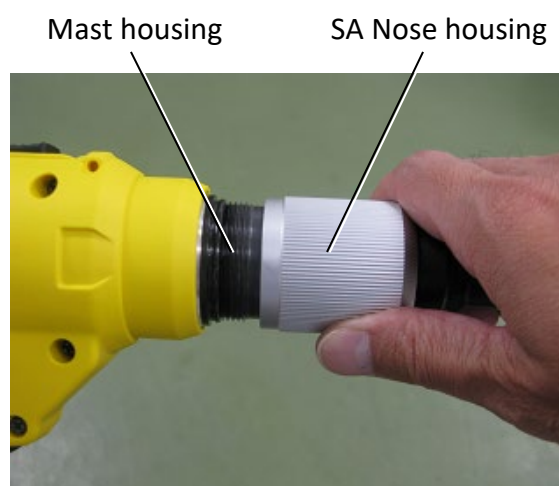

Tighten SA Nose housing onto the thread of Mast housing by hand.

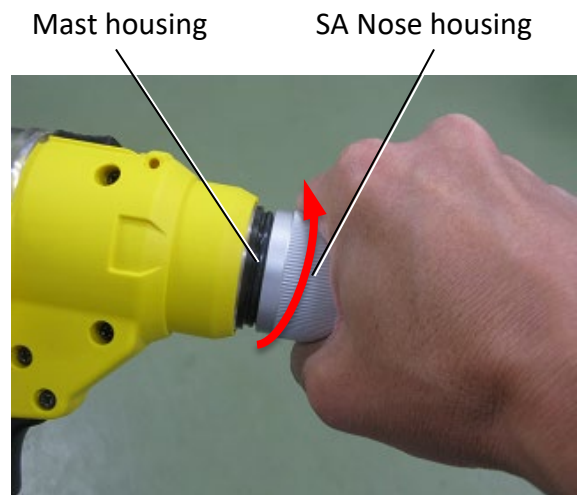

9. Operation Test and Appearance check

Operation Check

Set 20 rivets of 4.8mm (3/16") Stainless rivet and 10 Aluminum rivet to check followings:

- The tool(Jaws) does not slip.
- Rivet setting is done in one stroke.
- There are no protruding mandrels.
- There is no abnormal noise.
- The next rivet introduced to the front of the tool is inserted smoothly.
- The jaws do not bite.
- The waste mandrel is ejected to the Collector correctly.
- The collector shutter operates normally
(Open → Close)




Appearance check

- Any scratches on the housings
- Loose components and screws
- Any oil spots on the housings
- Peeling of the outer mold
(Rubber grip)

10. Restoring to factory settings

If the tool does not operate or does not operate correctly or the screen freezes and if the issue cannot be resolved by removing and re-attaching the battery, you can restore the tool to factory settings.

If the power is on, remove the battery.
Re-attach the battery and pull the trigger to turn on the power.
Touch 1. Upper left, 2. Upper right, 3. Lower left in the screen in order during showing Logo of Stanley Engineered Fastening for a few seconds.

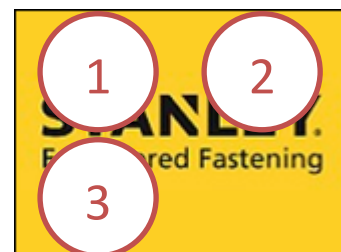


It is rebooted with the settings restored to factory settings. If it fails, try again.


*Counter value are not restored in this procedure.

After restoring to factory, the data in a memory on the tool must be reset.
If the backup is needed, touch "No" and be back to "19. Extracting the data" and copy the data required before clearing the data.

Extracting the data

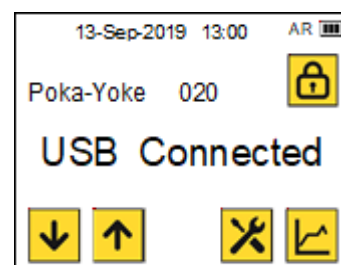

Deleting the data

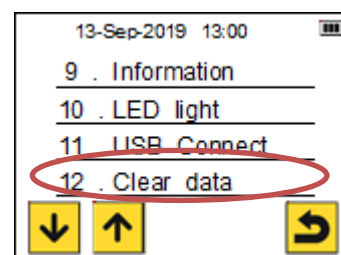

Delete the data referring to "20.
Deleting the data"

Remove the battery to turn off the power.

*After restoring process, turn off the power surely. The tool may not operate correctly.

*Refer to TRM00952 Smart Touch Screen Instruction Manual for detail.

11. Default settings

Default factory settings are as follows.

Functions	On/Off	Counters	On/Off	Setting value
Smart function	Off	Poka-Yoke	On	20
Assessment	Free setting	Service1	Off	100
Force range(kN)	1.0~8.0	Service2	Off	100
Stroke range(mm)	2.0~15.0	Service3	Off	100
Stroke range(Average mode)%	20	Mandrel	On	100
Force range(Average mode)%	20	Jaw	On	3000
Auto return	Off	Overhaul	On	50000
Password	2000			
Wi-Fi	Off			
Bluetooth	Off			
LED light	On			

12. Accessories

JP (JAPAN)

Model number	PB2500S-JP1831	PB2500S-JP1832
BATTERY PACK	DCB183-JP(1PC)	←(2PCS)
CHARGER	DCB115-JP	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP124-635	←
JAW PUSHER ASSEMBLY, 5	TP124-548	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00876	←
TOUCH SCREEN MANUAL	TRM00951	←

NA (NORTH AMERICA)

Model number	PB2500S-NA2031	PB2500S-NA2032
BATTERY PACK	DCB203-NA	←(2PCS)
CHARGER	DCB115-NA	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00990	←

QW (EUROPE)

Model number	PB2500S-QW1831	PB2500S-QW1832
BATTERY PACK	DCB183-XJ	←(2PCS)
CHARGER	DCB115-QW	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00991	←

GB (UK)

Model number	PB2500S-GB831	PB2500S-GB1832
BATTERY PACK	DCB183-XJ	←(2PCS)
CHARGER	DCB115-GB	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00991	←

XE (AUSTRALIA)

Model number	PB2500S-XE1831	PB2500S-XE1832
BATTERY PACK	DCB183-XE	←(2PCS)
CHARGER	DCB115-XE	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00990	←


XD (MALAYSIA)---TBD

Model number	PB2500-XD1831	PB2500S-XD1832
BATTERY PACK	DCB183-XJ	←(2PCS)
CHARGER	DCB115-XD	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00990	←

KR (KOREA)---TBD

Model number	PB2500S-KR1831	PB2500S-KR1832
BATTERY PACK	DCB183-KR	←(2PCS)
CHARGER	DCB115-KR	←
SA NOSEPIECE, 4	TRM00823	←
SA NOSEPIECE, 5	TRM00824	←
JAW PUSHER ASSEMBLY, 4	TP154-502	←
JAW PUSHER ASSEMBLY, 5	TP154-505	←
FOAM SPACER	TRM00194(1PC)	←(2PCS)
INSTRUCTION MANUAL	TRM00992(TBD)	←

13. Exploded View

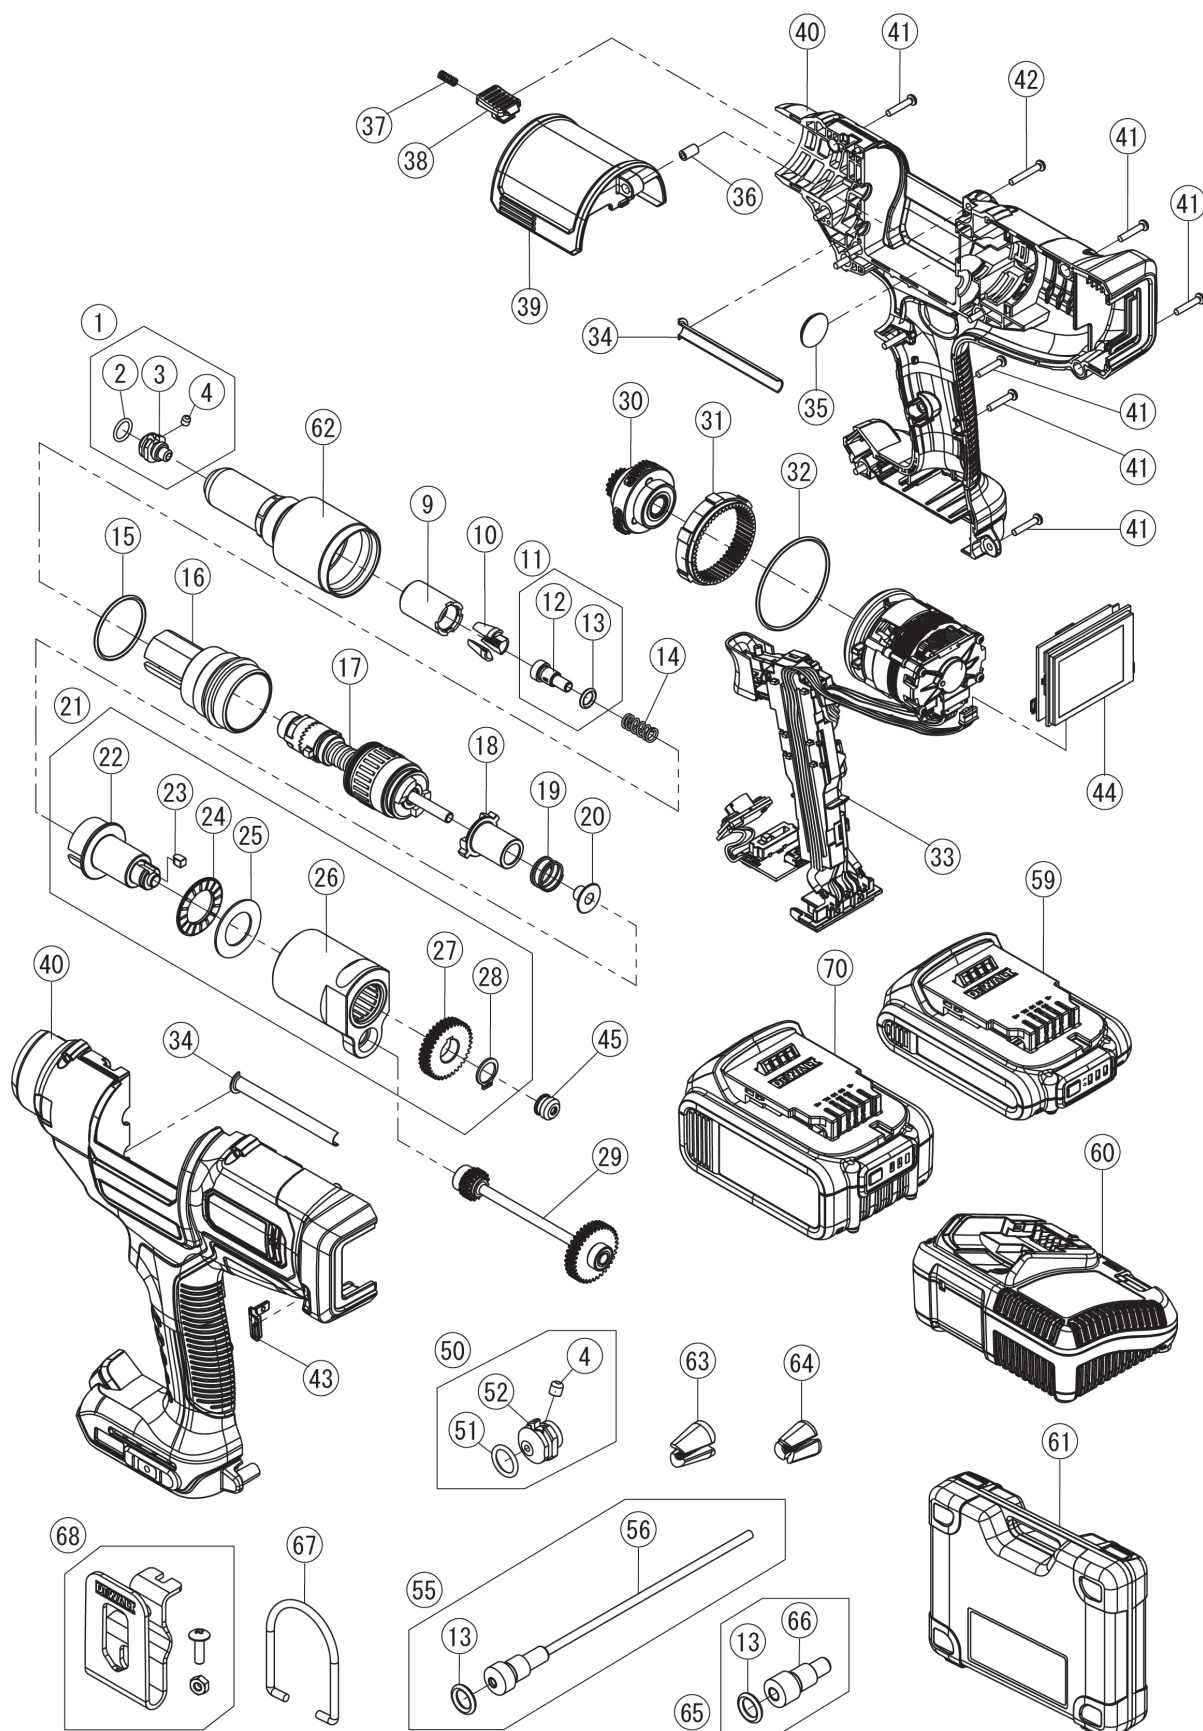

14. BOM

PB2500S-JP

No.	Part number	Description	Qty	
* 1	TRM00825	SA Nosepiece, 614	1	
* 2	DPN900-021	O ring	1	
* 3	TRM00394	Nosepiece	1	
* 4	TP144-645	Pin	1	
* 9	PRS2500-01	Jaw guide	1	
* 10	13300	Jaw	1set	
* 11	TP124-549	SA Jaw pusher, 6	1	
* 12	TP114-650	Jaw pusher	1	
* 13	TP124-501	O ring	1	
* 14	TP114-652	Jaw pusher spring	1	
* 15	TP124-505	O ring	1	
	16	TP113-610	Mast housing	1
	17	TRM00994	Pulling head assembly	1
	18	TP113-606	Spindle clutch	1
	19	TP114-666	Spindle clutch spring	1
	20	TP114-637	Tail guide	1
	21	TP123-553	Gear housing assembly	1
	22	TP113-605	Spindle	1
	23	TP114-627	Parallel key	1
	24	TP124-557	Thrust needle bearing	1
	25	TP124-558	Thrust race	1
	26	TP123-552	SA Gear housing	1
	27	TP113-646	Spur gear	1
	28	TP114-678	Snap ring	1
	29	TP123-551	SA Second shaft	1
	30	TP123-550	SA Planetary carrier	1
	31	N112877	Ring gear	1
	32	TP124-511	O ring	1
	33	TRM00872	SA Motor and Module	1
	34	TP114-628	Pipe bridge	1
	35	TP114-665	Mandrel plate	1
	36	TP114-676	Shutter guide sleeve	1
	37	TP114-677	Collector shutter lock spring	1
	38	TRM00869	Collector lock	1
	39	TRM00870	Collector shutter	1
	40	TRM00879	Housing assembly	1
	41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
	42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
	43	TRM00881	Cap USB	1
	44	TRM00871***	SA Smart touch screen module	1
	45	TRM00925	Tail cover	1
	62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP124-635	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP124-634	SA Jaw pusher, 4	1
* 55	TP124-548	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP124-611	SA Jaw pusher, 5	1
59	DCB183-JP **	Battery pack 2.0Ah	1 or 2
60	DCB115-JP	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00876	Instruction manual	1
●	TRM00951	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRG540-46B	1
67	PNT600-132	Hook	1
68	TP134-500	Belt hook kit	1
* 70	DCB182-JP	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-JP1831 : Battery Pack(2.0Ah) 1pc

PB2500S-JP1832 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centers.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-NA

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
* 16	TP113-610	Mast housing	1
* 17	TRM00994	Pulling head assembly	1
* 18	TP113-606	Spindle clutch	1
* 19	TP114-666	Spindle clutch spring	1
* 20	TP114-637	Tail guide	1
* 21	TP123-553	Gear housing assembly	1
* 22	TP113-605	Spindle	1
* 23	TP114-627	Parallel key	1
* 24	TP124-557	Thrust needle bearing	1
* 25	TP124-558	Thrust race	1
* 26	TP123-552	SA Gear housing	1
* 27	TP113-646	Spur gear	1
* 28	TP114-678	Snap ring	1
* 29	TP123-551	SA Second shaft	1
* 30	TP123-550	SA Planetary carrier	1
* 31	N112877	Ring gear	1
* 32	TP124-511	O ring	1
* 33	TRM00872	SA Motor and Module	1
* 34	TP114-628	Pipe bridge	1
* 35	TP114-665	Mandrel plate	1
* 36	TP114-676	Shutter guide sleeve	1
* 37	TP114-677	Collector shutter lock spring	1
* 38	TRM00869	Collector lock	1
* 39	TRM00870	Collector shutter	1
* 40	TRM00995	Housing assembly	1
* 41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
* 42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
* 43	TRM00881	Cap USB	1
* 44	TRM00871***	SA Smart touch screen module	1
* 45	TRM00925	Tail cover	1
* 62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
* 59	DCB203-NA**	Battery pack 2.0Ah	1 or 2
* 60	DCB115-NA	Charger	1
* 61	TRM00989	SA Kit box	1
●	TRM00990	Instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
* 67	PNT600-132	Hook	1
* 68	TP134-500	Belt hook kit	1
* 70	DCB204-NA	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-NA2031 : Battery Pack(2.0Ah) 1pc

PB2500S-NA2032 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-QW

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
16	TP113-610	Mast housing	1
17	TRM00994	Pulling head assembly	1
18	TP113-606	Spindle clutch	1
19	TP114-666	Spindle clutch spring	1
20	TP114-637	Tail guide	1
21	TP123-553	Gear housing assembly	1
22	TP113-605	Spindle	1
23	TP114-627	Parallel key	1
24	TP124-557	Thrust needle bearing	1
25	TP124-558	Thrust race	1
26	TP123-552	SA Gear housing	1
27	TP113-646	Spur gear	1
28	TP114-678	Snap ring	1
29	TP123-551	SA Second shaft	1
30	TP123-550	SA Planetary carrier	1
31	N112877	Ring gear	1
32	TP124-511	O ring	1
33	TRM00872	SA Motor and Module	1
34	TP114-628	Pipe bridge	1
35	TP114-665	Mandrel plate	1
36	TP114-676	Shutter guide sleeve	1
37	TP114-677	Collector shutter lock spring	1
38	TRM00869	Collector lock	1
39	TRM00870	Collector shutter	1
40	TRM00996	Housing assembly	1
41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
43	TRM00881	Cap USB	1
44	TRM00871***	SA Smart touch screen module	1
45	TRM00925	Tail cover	1
62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
59	DCB183-XJ**	Battery pack 2.0Ah	1 or 2
60	DCB115-XJ	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00991	Instruction manual	1
●	TRM00952	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 50	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
67	PNT600-132	Hook	1
68	TP134-500	Belt hook kit	1
* 70	DCB182-XJ	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-QW2031 : Battery Pack(2.0Ah) 1pc

PB2500S-QW2032 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-GB

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
16	TP113-610	Mast housing	1
17	TRM00994	Pulling head assembly	1
18	TP113-606	Spindle clutch	1
19	TP114-666	Spindle clutch spring	1
20	TP114-637	Tail guide	1
21	TP123-553	Gear housing assembly	1
22	TP113-605	Spindle	1
23	TP114-627	Parallel key	1
24	TP124-557	Thrust needle bearing	1
25	TP124-558	Thrust race	1
26	TP123-552	SA Gear housing	1
27	TP113-646	Spur gear	1
28	TP114-678	Snap ring	1
29	TP123-551	SA Second shaft	1
30	TP123-550	SA Planetary carrier	1
31	N112877	Ring gear	1
32	TP124-511	O ring	1
33	TRM00872	SA Motor and Module	1
34	TP114-628	Pipe bridge	1
35	TP114-665	Mandrel plate	1
36	TP114-676	Shutter guide sleeve	1
37	TP114-677	Collector shutter lock spring	1
38	TRM00869	Collector lock	1
39	TRM00870	Collector shutter	1
40	TRM00996	Housing assembly	1
41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
43	TRM00881	Cap USB	1
44	TRM00871***	SA Smart touch screen module	1
45	TRM00925	Tail cover	1
62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
59	DCB183-XJ**	Battery pack 2.0Ah	1 or 2
60	DCB115-GB	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00991	Instruction manual	1
●	TRM00952	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
67	PNT600-132	Hook	1
68	TP134-500	Belt hook kit	1
* 70	DCB182-XJ	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-GB1831 : Battery Pack(2.0Ah) 1pc

PB2500S-GB1832 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-XE

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
16	TP113-610	Mast housing	1
17	TRM00994	Pulling head assembly	1
18	TP113-606	Spindle clutch	1
19	TP114-666	Spindle clutch spring	1
20	TP114-637	Tail guide	1
21	TP123-553	Gear housing assembly	1
22	TP113-605	Spindle	1
23	TP114-627	Parallel key	1
24	TP124-557	Thrust needle bearing	1
25	TP124-558	Thrust race	1
26	TP123-552	SA Gear housing	1
27	TP113-646	Spur gear	1
28	TP114-678	Snap ring	1
29	TP123-551	SA Second shaft	1
30	TP123-550	SA Planetary carrier	1
31	N112877	Ring gear	1
32	TP124-511	O ring	1
33	TRM00872	SA Motor and Module	1
34	TP114-628	Pipe bridge	1
35	TP114-665	Mandrel plate	1
36	TP114-676	Shutter guide sleeve	1
37	TP114-677	Collector shutter lock spring	1
38	TRM00869	Collector lock	1
39	TRM00870	Collector shutter	1
40	TRM00997	Housing assembly	1
41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
43	TRM00881	Cap USB	1
44	TRM00871***	SA Smart touch screen module	1
45	TRM00925	Tail cover	1
62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
59	DCB183-XE**	Battery pack 2.0Ah	1 or 2
60	DCB115-XE	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00990	Instruction manual	1
●	TRM00952	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
67	PNT600-132	Hook	1
68	TP134-500	Belt hook kit	1
* 70	DCB182-XE	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-XE1831 : Battery Pack(2.0Ah) 1pc

PB2500S-XE1832 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-XD

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
16	TP113-610	Mast housing	1
17	TRM00994	Pulling head assembly	1
18	TP113-606	Spindle clutch	1
19	TP114-666	Spindle clutch spring	1
20	TP114-637	Tail guide	1
21	TP123-553	Gear housing assembly	1
22	TP113-605	Spindle	1
23	TP114-627	Parallel key	1
24	TP124-557	Thrust needle bearing	1
25	TP124-558	Thrust race	1
26	TP123-552	SA Gear housing	1
27	TP113-646	Spur gear	1
28	TP114-678	Snap ring	1
29	TP123-551	SA Second shaft	1
30	TP123-550	SA Planetary carrier	1
31	N112877	Ring gear	1
32	TP124-511	O ring	1
33	TRM00872	SA Motor and Module	1
34	TP114-628	Pipe bridge	1
35	TP114-665	Mandrel plate	1
36	TP114-676	Shutter guide sleeve	1
37	TP114-677	Collector shutter lock spring	1
38	TRM00869	Collector lock	1
39	TRM00870	Collector shutter	1
40	TRM00996	Housing assembly	1
41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
43	TRM00881	Cap USB	1
44	TRM00871***	SA Smart touch screen module	1
45	TRM00925	Tail cover	1
62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
59	DCB183-XJ**	Battery pack 2.0Ah	1 or 2
60	DCB115-XD	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00990	Instruction manual	1
●	TRM00952	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
* 67	PNT600-132	Hook	1
* 68	TP134-500	Belt hook kit	1
* 70	DCB182-XJ	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-XD1831 : Battery Pack(2.0Ah) 1pc

PB2500S-XD1832 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

PB2500S-KR

No.	Part number	Description	Qty
* 1	TRM00825	SA Nosepiece, 614	1
* 2	DPN900-021	O ring	1
* 3	TRM00394	Nosepiece	1
* 4	TP144-645	Pin	1
* 9	PRS2500-01	Jaw guide	1
* 10	71210-15001	Jaw	1set
* 11	TP154-500	SA Jaw pusher, 6	1
* 12	TP154-501	Jaw pusher	1
* 13	TP124-501	O ring	1
* 14	TP114-652	Jaw pusher spring	1
* 15	TP124-505	O ring	1
16	TP113-610	Mast housing	1
17	TRM00994	Pulling head assembly	1
18	TP113-606	Spindle clutch	1
19	TP114-666	Spindle clutch spring	1
20	TP114-637	Tail guide	1
21	TP123-553	Gear housing assembly	1
22	TP113-605	Spindle	1
23	TP114-627	Parallel key	1
24	TP124-557	Thrust needle bearing	1
25	TP124-558	Thrust race	1
26	TP123-552	SA Gear housing	1
27	TP113-646	Spur gear	1
28	TP114-678	Snap ring	1
29	TP123-551	SA Second shaft	1
30	TP123-550	SA Planetary carrier	1
31	N112877	Ring gear	1
32	TP124-511	O ring	1
33	TRM00872	SA Motor and Module	1
34	TP114-628	Pipe bridge	1
35	TP114-665	Mandrel plate	1
36	TP114-676	Shutter guide sleeve	1
37	TP114-677	Collector shutter lock spring	1
38	TRM00869	Collector lock	1
39	TRM00870	Collector shutter	1
40	TRM00998	Housing assembly	1
41	TP124-513	Cross recessed pan head tapping screws(3-16)	12
42	TP124-514	Cross recessed pan head tapping screws(3-20)	1
43	TRM00881	Cap USB	1
44	TRM00871***	SA Smart touch screen module	1
45	TRM00925	Tail cover	1
62	TP133-570	SA Nose housing	1

No.	Part number	Description	Qty
Accessories			
* 50	TRM00823	SA Nosepiece, 414	1
* 51	DPN900-013	O ring	1
* 52	TRM00820	Nosepiece	1
* 4	TP144-645	Pin	1
* 50	TRM00824	SA Nosepiece, 514	1
* 51	DPN900-013	O ring	1
* 52	TRM00819	Nosepiece	1
* 4	TP144-645	Pin	1
* 55	TP154-502	Jaw pusher assembly, 4	1
* 13	TP124-501	O ring	1
* 56	TP154-503	SA Jaw pusher, 4	1
* 55	TP154-505	Jaw pusher assembly, 5	1
* 13	TP124-501	O ring	1
* 56	TP154-506	SA Jaw pusher, 5	1
59	DCB183-KR**	Battery pack 2.0Ah	1 or 2
60	DCB115-KR	Charger	1
61	TRM00880	SA Kit box	1
●	TRM00992	Instruction manual	1
●	TRM00952	Smart screen instruction manual	1
Options			
* 50	TRM00822	SA Nosepiece, 314	1
* 50	TP124-544	SA Nosepiece, 424	1
* 50	TP124-615	SA Nosepiece, 434	1
* 50	TP124-545	SA Nosepiece, 524	1
* 50	TP124-546	SA Nosepiece, 624	1
* 50	TRM00826	SA Nosepiece, 6K	1
* 55	TP124-547	Jaw pusher assembly, 3	1
* 55	TP124-638	Jaw pusher assembly, 4 for PRG540-46B	1
* 55	TP124-618	Jaw pusher assembly, 5 for PRG540-46B	1
* 63	PRG540-46B	Jaw	1set
* 64	PRL650-01	Jaw	1set
* 65	TP124-620	SA Jaw pusher, 6 for PRL650-01	1
67	PNT600-132	Hook	1
68	TP134-500	Belt hook kit	1
* 70	DCB182-KR	Battery pack 4.0Ah	1

*Consumable

**The quantity and type of Li-Ion Battery Packs depends on Model Number and region sold.

PB2500S-KR1831 : Battery Pack(2.0Ah) 1pc

PB2500S-KR1832 : Battery Pack(2.0Ah) 2pcs

***If TRM00871 is needed to replace, contact your local reseller or SEF service centres.

Note : If the Model Number purchased is a bare tool then only the Cordless Installation Tool will be supplied with a standard set of 4.8mm [3/16"].

15. Troubleshooting Guide

Tool

Symptom	Cause	Remedy
Tool does not operate when switch is pressed.	Battery is defective	Replace battery
	Battery is not fully charged	Charge battery
	Battery is not fully seated	Remove battery and re-insert. Reset tool to home.
	Battery pack has reached operating temperature limit through continuous use or defect.	Remove battery & allow to cool. Mount battery and reset tool to home.
	Screen does not show counter display.	Switch to counter display.
	An error message shows up.	Reset error.
	Screen freezes.	Remove battery, wait 5 seconds and reinsert.
	Issue with Trigger Module	Replace.
Tool does not return to initial position when switch is released.	Electrical malfunction.	Remove battery, wait 5 seconds and reinsert. Reset tool to home.
	Stuck Spindle Clutch.	Clean Spindle clutch and Spindle to operate smoothly.
Tool stops before rivet is fully set	Battery pack has reached operating temperature limit through continuous use or defect.	Remove battery & allow to cool. Mount battery and reset tool to home.
	Improper nosepiece selection.	Reset tool to home, remove rivet & fit proper nose piece.
	Setting load of rivet is beyond tool capacity.	Reset tool to home, remove rivet & use appropriate tool to set rivet.
Tool fails to operate	Issue with Trigger Module	Replace.
Tool does not return fully	Buildup of debris inside the Nose Equipment.	Service and clean Nose Assembly.
More than one operation of the trigger needed to place rivet	Buildup of debris inside the Nose Equipment.	Service and clean Nose Assembly.
	Worn or broken Jaws.	Fit new Jaws.
	Improper rivet being used for application grip thickness	Review application details and verify fastener requirement
	Jaw Guide or Pulling Head Adapter not seated correctly.	Correctly assemble affected parts
Tool will not grip stem of rivet	Buildup of debris inside the Nose Equipment.	Service and clean Nose Assembly.
	Worn or broken Jaws.	Fit new Jaws.
	Loose Jaw Guide.	Tighten jaw guide against Pulling Head.
	Weak or broken Spring.	Fit new spring.
	Incorrect Nose Piece for rivet.	Refer to Accessories Manual. Select and install correct nose piece
	Incorrect Nose Equipment for rivet.	Refer to Accessories Manual. Select and install correct nose equipment
Jaws will not release broken stem of rivet	Buildup of debris inside the Nose Equipment.	Service and clean Nose Assembly.
	Weak or broken Spring.	Fit new spring.
	Jaw Guide, Nose Piece or Nose Housing not seated correctly.	Correctly assemble affected parts

ENGLISH

	Stem retention/removal feature worn out on Nose Piece	Inspect Nose Piece and replace O-ring and ball/pin as required
Cannot insert rivet	Incorrect Nose Piece for rivet.	Refer to Accessories Manual. Select and install correct nose piece
	Broken rivet stems jammed in Nose Equipment.	Service and clean Nose Assembly.
		Refer to Accessories Manual.
		Check Nose Equipment is correct for rivet
	Broken rivet stems jammed in Pulling Head Assembly.	Empty Stem Collector and clear Pulling Head Assembly.
	Debris in Nose Piece.	Service and clean Nose Assembly.
Rivet stem does not break	Battery is low voltage.	Charge battery
	Setting load of rivet is beyond tool capacity.	Reset tool to home, remove rivet & use appropriate tool to set rivet.
	Incorrect Nose Equipment for rivet.	Refer to Accessories Manual. Select and install correct nose equipment
	Nose Equipment and Stem Collector full of stems.	Empty Stem Collector and check Nose Equipment for damage before re-use

Screen

Symptom	Cause	Remedy
Power does not turn on.	1. Battery is not fully seated	Remove battery and re-insert. Reset tool to home.
	2. Battery is not fully charged	Charge battery
	3. Battery is defective	Replace battery
	4. Battery pack has reached operating temperature limit through continuous use or defect	Remove battery & allow to cool. Mount battery and reset tool to home.
Screen freezes in Stanley Engineered Fastening Logo.	1. Data reading fails	Remove battery and re-insert. Press trigger to turn on.
	2. Smart screen is defective	Contact a local service center
	3. Trigger module is defective	Replace motor & module assembly
	4. Setting data are broken	Restore to factory settings
Tool does not operate when trigger switch is pressed.	1. Screen is not home screen(Counter screen)	Change screen to home screen. Touch "Back home" icon to be back home.
	2. Screen freezes Even if touch screen, screen doesn't respond or screen becomes all white.	Remove battery and re-insert. Press trigger to turn on. If does not revert, contact local service center.
	3. Alarm message is shown with beep sound.	Reset alarm referring to the related pages.
	4. Setting data are broken	Restore to factory settings
	5. Radio communication error	Even if restores to factory settings, if does not revert, contact local service center.
Tool shows NOK, even if it sets rivet correctly.	1. Judgement range setting is not correct	Set judgement range correctly
	2. Judgement range setting is too small	Set appropriate range
	3. Not fasten 5 rivets in average mode	Fasten 5 rivets, if it has an error, do it again
	4. Jaw slips.	Do maintenance around jaw area
	5. Tool is not at home position	Reset tool to home
	6. There is a problem in tool.	Remove cause of issue or contact local service center
	7. Trigger module is defective.	Replace motor & module assembly or contact local service center
Tool does not show NOK, even if it sets incorrect rivet	1. Judgement range setting is not correct	Set judgement range correctly
	2. Judgement range setting is too large	Set appropriate range
	3. Not fasten 5 rivets in average mode	Fasten 5 rivets, if it has an error, do it again

ENGLISH

	4. There is a problem in tool.	Remove cause of issue or contact local service center
	5. Trigger module is defective.	Replace motor & module assembly or contact local service center
	6. Smart function is turned off.	No NOK judgement if smart function is turned off. If needed, turn on smart function
Screen does not show process curve or does not show correctly.	1. Smart function is turned off.	Turn on smart function
	2. Rivet break load is small, it is under 3,000N	Turn off smart function, if low break load rivets are used
Tool does not count correctly (does not count or counts even if it does not set rivet).	1. Rivet break load is too small, it is under 2,000N	Counter function cannot be used in very low break load rivet.
	2. Riveting cycle is too fast. Pulled trigger before judgement.	Pull trigger for next riveting after judgement.
	4. Setting data are broken	Restore to factory settings
Rivets / Charge is low.	1. Smart function is turned on.	Rivets / Charge decreases, if smart function is turned on. Turn on/off smart function as needed.
	2. Battery is not fully charged	Check battery charge level and charge battery
	3. Battery is defective	Replace battery

**STANLEY Engineered Fastening**

4 Shelter Rock Lane
Danbury, Connecticut,
United States, 06810
Tel. 877 364 2781
Fax 800 225 5614



Holding your world together®

Find your closest STANLEY Engineered Fastening location on
www.stanleyengineeredfastening.com/contact

For an authorized distributor or near by please check

www.stanleyengineeredfastening.com/econtact/distributors

Manual Number	Issue	C/N
TRM01042	0	200820-1

©2020 Stanley Black & Decker, Inc.

Avdel®, Avex®, Avibulb®, Avinox®, Bulbex®, Hemlok®, Interlock®, Klamp-Tite®, Monobolt®, POP®, ProSet®, Stavex® and T-Lok® are registered trademarks of Stanley Black & Decker, Inc. and its affiliates. The names and logos of other companies mentioned herein may be trademarks of their respective owners. Data shown is subject to change without prior notice as a result of continuous product development and improvement policy. Your local STANLEY Engineered Fastening representative is at your disposal should you need to confirm latest information.