

GRIPCO®



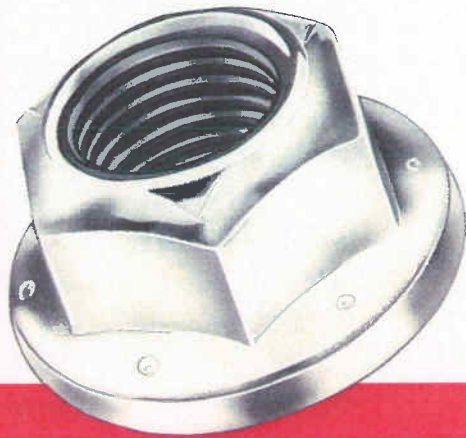


TABLE OF CONTENTS

PREVAILING TORQUE – INCH	SERIES	PAGE
Crownlock Nuts	Grade A	3
Crownlock Nuts	Grade B	4
Crownlock Nuts	Grade C	5
Crownlock Flange Nuts	Grade G	6
Centerlock Nuts	Grade A-B	7
Toplock Nuts	Jam & Machine Screw Series	8
Toplock Flange Nuts	Grade A	9
PREVAILING TORQUE – METRIC		
Metric Crownlock Nuts	Class 9	10
Metric Crownlock Nuts	Class 10	11
Metric Crownlock Flange Nuts	Class 9	12
Metric Crownlock Flange Nuts	Class 10	13
PREPOSITIONED – INCH		
Pilot Projection Weld Nuts	Standard Series	14
Pilot Projection Weld Nuts	Grade B	15
Clinch Nuts	Standard Series	16
Countersunk Weld Nuts	Standard Series	17
Tab Weld Nuts Pilot Projection	P1Series	18
Tab Weld Nuts Pilot Projection	P2 Series	19
Tab Weld Nuts Pilot Projection	S1Series	20
Tab Weld Nuts Pilot Projection	S2 Series	21
PREPOSITIONED METRIC		
Metric Pilot Projection Weld Nuts	Class 9 – Standard Series	22
Metric Pilot Projection Weld Nuts	Class 9 – Counterbore	23
Metric Clinch Nuts	Class 9 Series	24
Metric Tab Weld Nuts Pilot Projection	P1M Series	25
Metric Tab Weld Nuts Pilot Projection	P2M Series	27
Metric Tab Weld Nuts Pilot Projection	S1M Series	28
SPECIALTY PRODUCTS		
Hot Formed Products		29
Warranty Policy		30

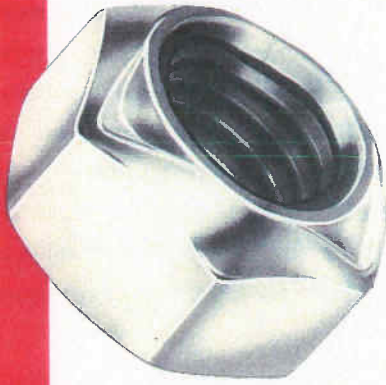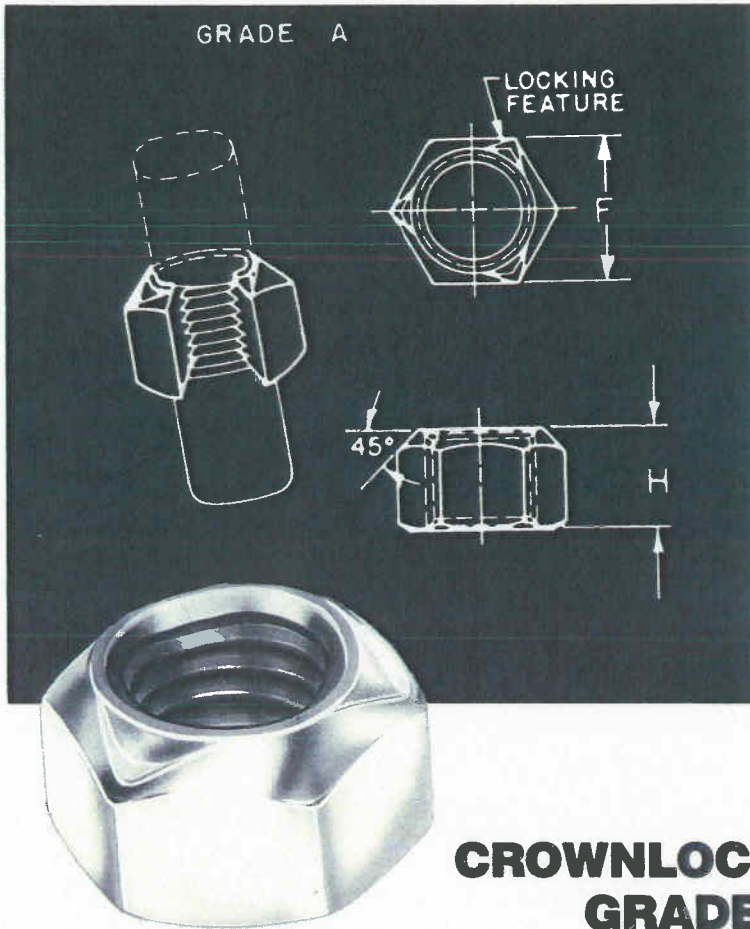

Grade A



CROWNLOCK NUTS


The Gripco Grade A Crownlock Nuts are manufactured from low carbon steel to meet Grade 2 performance specifications. These prevailing torque nuts are designed for use with Grade 2 bolts.

- No markings are required for a Grade A prevailing torque nut.
- Parts are furnished with a cadmium and wax finish or as requested.
- Gripco Crownlock Nuts meet or exceed all current I.F.I. specifications.
- Prices and samples are available upon request.

CROWNLOCK NUTS GRADE A

SIZE	COARSE PART NO.	SIZE	FINE PART NO.	(F) WIDTH ACROSS FLATS		(H) THICKNESS		CARTON QTY.	WEIGHT PER M
				MAX.	MIN.	MAX.	MIN.		
1/4-20	TLA-1420-S-GRA	1/4-28	TLA-1428-S-GRA	.438	.428	.226	.212	9,000	6.7
5/16-18	TLA-5618-S-GRA	5/16-24	TLA-5624-S-GRA	.500	.489	.273	.258	6,000	10.0
3/8-16	TLA-3816-S-GRA	3/8-24	TLA-3824-S-GRA	.562	.551	.337	.320	4,000	14.7
7/16-14	TLA-7614-S-GRA	7/16-20	TLA-7620-S-GRA	.688	.675	.385	.365	2,000	26.3
1/2-13	TLA-1213-S-GRA	1/2-20	TLA-1220-S-GRA	.750	.736	.448	.427	1,500	34.7
5/8-11	TLA-5811-S-GRA	5/8-18	TLA-5818-S-GRA	.938	.922	.559	.535	800	66.0
3/4-10	TLA-3410-S-GRA	3/4-16	TLA-3416-S-GRA	1.125	1.088	.665	.617	500	115.0
7/8-9	TLA-7809-S-GRA	7/8-14	TLA-7814-S-GRA	1.312	1.269	.776	.724	300	178.0
1"-8	TLA-10008-S-GRA	1"-14	TLA-10014-S-GRA	1.500	1.450	.887	.831	200	268.0
1 1/8-7	TLA-11807-S-GRA	1 1/8-12	TLA-11812-S-GRA	1.688	1.631	.999	.939	120	386.0
1 1/4-7	TLA-11407-S-GRA	1 1/4-12	TLA-11412-S-GRA	1.875	1.812	1.094	1.031	90	500.0
1 1/2-6	TLA-11206-S-GRA	1 1/2-12	TLA-11212-S-GRA	2.250	2.175	1.317	1.245	50	863.0



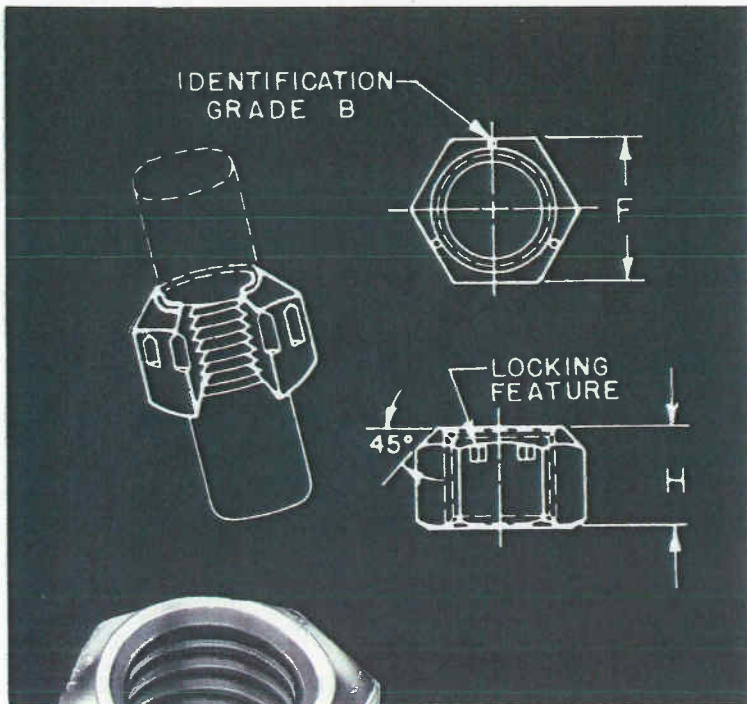

Grade B

CROWNLOCK NUTS

The Gripco Grade B Crownlock Nuts are manufactured from low carbon steel and processed to meet Grade 5 performance specifications. These prevailing torque nuts are designed for use with Grade 5 bolts.

- Three dots at 120° intervals on the crown of the nut identify this product as a Grade B prevailing torque nut.
- Parts are furnished with a cadmium and wax finish or as requested.
- Gripco Crownlock Nuts meet or exceed all current I.F.I. specifications.
- Prices and samples are available upon request.






CROWNLOCK NUTS GRADE B

SIZE	COARSE PART NO.	SIZE	FINE PART NO.	(F) WIDTH ACROSS FLATS		(H) THICKNESS		CARTON QTY.	WEIGHT PER M
				MAX.	MIN.	MAX.	MIN.		
8-32	**TLA-0832-S-GRB			.344	.332	.195	.179	19,000	3.4
10-24	**TLA-1024-S-GRB	10-32	**TLA-1032-S-GRB	.375	.362	.211	.195	15,00	4.3
1/4-20	WLA-1420-S-GRB	1/4-28	WLA-1428-S-GRB	.438	.428	.257	.243	8,500	7.8
5/16-18	WLA-5618-S-GRB	5/16-24	WLA-5624-S-GRB	.500	.489	.302	.292	5,500	11.2
3/8-16	WLA-3816-S-GRB	3/8-24	WLA-3824-S-GRB	.562	.551	.377	.360	3,500	16.0
7/16-14	WLA-7614-S-GRB	7/16-20	WLA-7620-S-GRB	.688	.675	.430	.410	2,000	29.8
1/2-13	WLA-1213-S-GRB	1/2-20	WLA-1220-S-GRB	.750	.736	.510	.490	1,500	39.4
5/8-11	WLA-5811-S-GRB	5/8-18	WLA-5818-S-GRB	.938	.922	.645	.621	700	78.9
3/4-10	WLA-3410-S-GRB	3/4-16	WLA-3416-S-GRB	1.125	1.088	.750	.702	450	126.0

NOTE: 7/8-NC & NF and 1" NC & NF Available

**These sizes will have same type locking feature as Crownlock Nuts A and C.



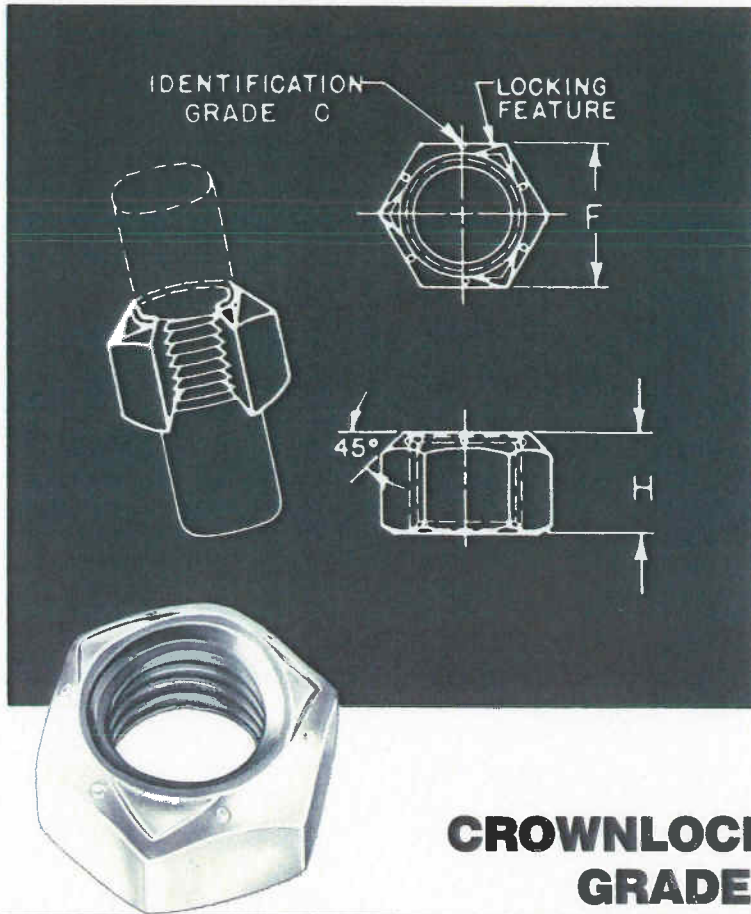

Grade C




CROWNLOCK NUTS


The Gripco Grade C Crownlock Nuts are manufactured from medium carbon steel and heat treated to meet Grade 8 performance specifications. These prevailing torque nuts are designed for high strength applications for use with Grade 8 bolts.

- Six dots at 60° intervals on the crown of the nut identify this product as a Grade C prevailing torque nut.
- Parts are furnished with a cadmium and wax finish or as requested.
- Gripco Crownlock Nuts meet or exceed all current I.F.I. specifications.
- Prices and samples are available upon request.

CROWNLOCK NUTS GRADE C

SIZE	COARSE PART NO.	SIZE	FINE PART NO.	(F) WIDTH ACROSS FLATS		(H) THICKNESS		CARTON QTY.	WEIGHT PER M
				MAX.	MIN.	MAX.	MIN.		
1/4-20	TLA-1420-S-GRC	1/4-28	TLA-1428-S-GRC	.438	.428	.226	.212	9,000	6.7
5/16-18	TLA-5618-S-GRC	5/16-24	TLA-5624-S-GRC	.500	.489	.273	.258	6,000	10.0
3/8-16	TLA-3816-S-GRC	3/8-24	TLA-3824-S-GRC	.562	.551	.337	.320	4,000	14.7
7/16-14	TLA-7614-S-GRC	7/16-20	TLA-7620-S-GRC	.688	.675	.385	.365	2,000	26.3
1/2-13	TLA-1213-S-GRC	1/2-20	TLA-1220-S-GRC	.750	.736	.448	.427	1,500	34.7
9/16-12	TLA-9612-S-GRC	9/16-18	TLA-9618-S-GRC	.875	.861	.496	.473	1,000	53.7
5/8-11	TLA-5811-S-GRC	5/8-18	TLA-5818-S-GRC	.938	.922	.559	.535	800	66.0
3/4-10	TLA-3410-S-GRC	3/4-16	TLA-3416-S-GRC	1.125	1.088	.665	.617	500	115.0
7/8-9	TLA-7809-S-GRC	7/8-14	TLA-7814-S-GRC	1.312	1.269	.776	.724	300	178.0
1"-8	TLA-10008-S-GRC	1"-14	TLA-10014-S-GRC	1.500	1.450	.887	.831	200	268.0
1 1/8-7	TLA-11807-S-GRC	1 1/8-12	TLA-11812-S-GRC	1.688	1.631	.999	.939	120	377.9
1 1/4-7	TLA-11407-S-GRC	1 1/4-12	TLA-11412-S-GRC	1.875	1.812	1.094	1.030	90	500.0
1 1/2-6	TLA-11206-S-GRC	1 1/2-12	TLA-11212-S-GRC	2.250	2.175	1.317	1.245	50	863.0

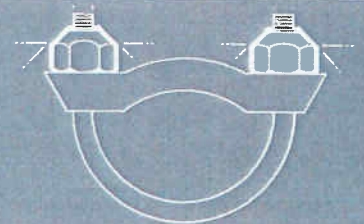

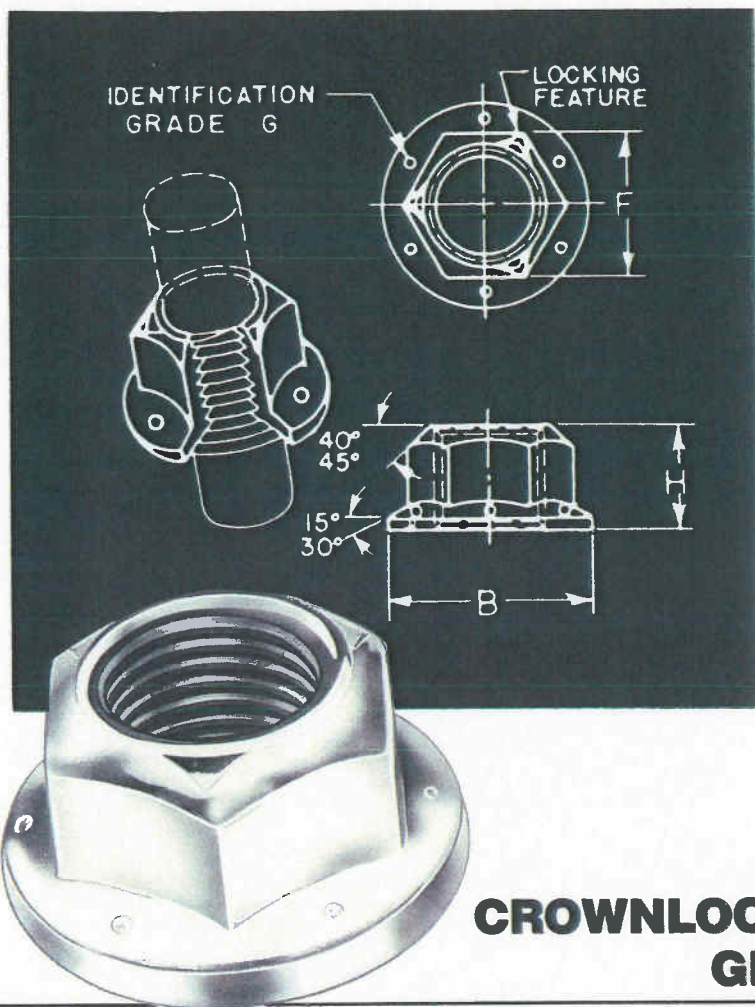

Grade G CROWNLOCK FLANGE NUTS

The Gripco Grade G Crownlock Flange Nuts are manufactured from medium carbon steel and heat treated to meet Grade G performance specifications. Greater height and the added hoop strength of the flange provide 30% more strength than a standard nut. These prevailing torque nuts are designed for high strength applications for use with Grade 8 bolts.

Six dots at 60° intervals on the top of the flange identify this product as a Grade G prevailing torque flange nut.

- Parts are furnished with a cadmium and wax finish or as requested.
- Gripco Crownlock Flange Nuts meet or exceed all current I.F.I. specifications.
- Prices and samples are available upon request.

CROWNLOCK FLANGE NUTS GRADE G

SIZE	COARSE PART NO.	SIZE	FINE PART NO.	(F) WIDTH ACROSS FLATS		(H) THICKNESS		(B) FLANGE DIAMETER		CARTON QTY.	WEIGHT PER M
				MAX.	MIN.	MAX.	MIN.	MAX.	MIN.		
1/4-20	TLGF-1420-S	1/4-28	TLGF-1428-S	.4385	.428	.291	.251	.560	.522	6,000	9.6
5/16-18	TLGF-5618-S	5/16-24	TLGF-5624-S	.502	.489	.354	.303	.680	.642	4,400	14.8
3/8-16	TLGF-3816-S	3/8-24	TLGF-3824-S	.5645	.551	.421	.357	.810	.770	2,000	25.0
7/16-14	TLGF-7614-S	7/16-20	TLGF-7620-S	.6895	.675	.482	.414	.930	.888	1,500	38.7
1/2-13	TLGF-1213-S	1/2-20	TLGF-1220-S	.752	.736	.550	.469	1.070	1.026	1,000	54.7
9/16-12	TLGF-9612-S	9/16-18	TLGF-9618-S	.877	.861	.611	.527	1.190	1.146		
5/8-11	TLGF-5811-S	5/8-18	TLGF-5818-S	.9395	.922	.678	.581	1.330	1.280	500	107.0
3/4-10	TLGF-3410-S	3/4-16	TLGF-3416-S	1.127	1.088	.802	.682	1.585	1.529	325	166.6
7/8-9	TLGF-7809-S	7/8-14	TLGF-7814-S	1.3145	1.269	.928	.794	1.840	1.778	200	270.5
1"-8	TLGF-10008-S	1"-14	TLGF-10014-S	1.502	1.450	1.047	.897	2.106	2.038		

