


Features

- Average cycle time of less than 2 seconds
- High capacity, magazine fed fasteners
- Robust and durable construction
- Lightweight construction and low actuation recoil
- Available with in-line handle or bottom hose configuration
- Low maintenance handtool
- Long life, self priming intensifier
- Long reach barrel

Benefits


- Increased productivity
- Reduced component handling and subsequent spillage
- Reduced operator fatigue
- Optimised ergonomic performance for improved productivity
- Productive time is maximised
- Consistent actuation and hence joint formation
- Can be used in many difficult access applications

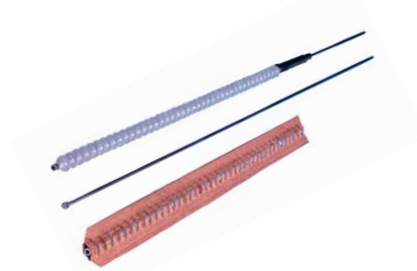

Specifications

Weight (pistol only)	1.2 kg (2.6 lbs)
Pull Force @ 5.5 bar	3.89 kN (875 lbf)
Stroke min.	30 mm (1.18 ins)
Cycle Time	1.0 sec
Air Supply Pressure	5 – 7 bar
Free Air Volume @ 5.1 bar	2.6 litres
Noise Level	< 70 dB(A)
Vibration	< 2.5 m/s ²
Intensification ratio	32:1

Dimensions (mm/inches)

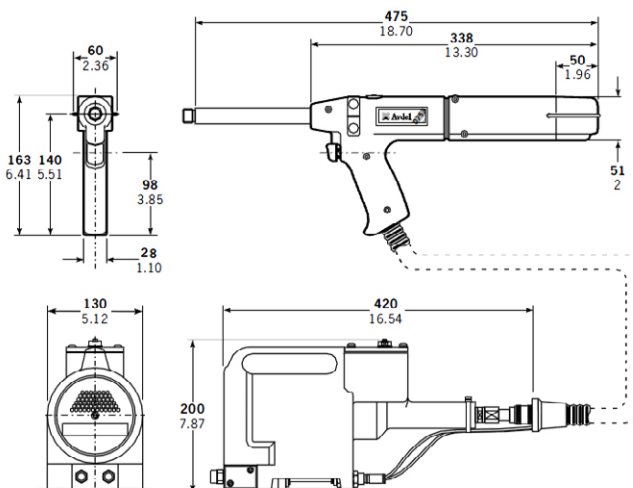

Placing Capability

The 7530 placing tool can place the whole range of Speed Fastening® fasteners from diameter 2.4 mm (3/32") to 6.4 mm (1/4").

For detailed information on placing capability and nose equipment please refer to the tool manual or contact your local STANLEY Engineered Fastening representative.

STANLEY®
Engineered Fastening

www.StanleyEngineeredFastening.com

© 2014 Stanley Black & Decker, Inc., Rev. 07b.2011

Avdel® and Speed Fastening® are trademarks of Avdel UK Limited. POP® is a trademark of Emhart Technologies.
Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local STANLEY Engineered Fastening representative is at your disposal should you need to confirm latest information.

Avdel UK Limited
Stanley House, Works Road
Letchworth Garden City, Hertfordshire SG6 1JY
Tel. +44 (0)1582 900-000 · Fax -001
enquiries2@sbdinc.com