

Octolok[®] Fasteners


High Performance staking Studs and Nuts
(Imperial product range)

Octolok® High Performance staking Studs and Nuts

Octolok® studs and nuts are Grade strength fasteners designed to provide external or internal threads in the most demanding applications including light gauge sheet materials.

Octolok® fasteners improve quality & reliability, simplify production processes and reduce the cost of assembly. Octolok® fasteners can replace weld-studs and eliminate painting/plating costs.

Octolok® fasteners are placed into drilled or pre-punched holes of a specific diameter recommended for each size fastener. A press applied force drives the 8 lobe forming feature into the application material forcing the material to flow into the fastener retention groove delivering excellent torque-to-turn performance whilst the retaining ring provides superior push-out values. Octolok® fasteners can be placed manually one at a time or the assembly process can be automated.

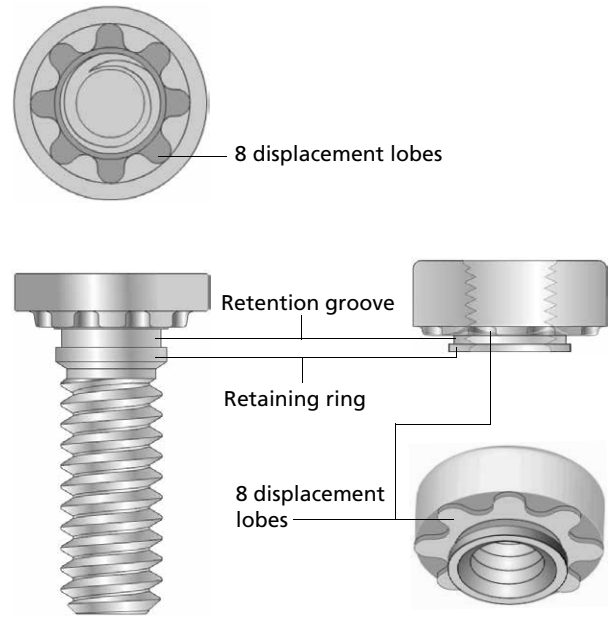

Octolok® 8 lobe symmetrical configuration

- Superior torque-to-turn & vibration resistance
- Increased push-out value performance
- Utilize existing 6 lobe clinch stud press/tooling

Installation can be automated

- High speed installation reduces assembly cost

Heat treated to SAE standard/ISO class

- High strength can allow reduction in fastener diameter for lower cost assembly


Available in imperial and metric sizes

- Suitable for all markets - manufactured to customer requirements

Available in assorted coatings/finishes



- Ready to use, no re-plating or painting required

Assembly Applications

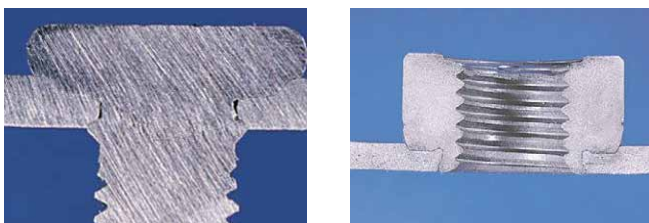

Cross section of material flow after completed installation

Octelok® Studs Dimensional & Performance Data

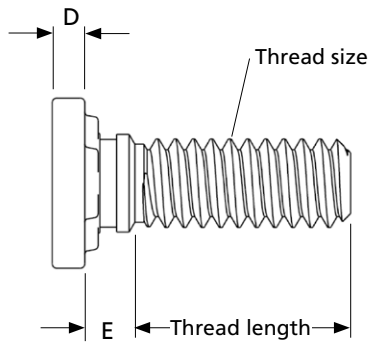

Material: Carbon steel SAE J429
Surface: as required

Underhead shape and dimensions controlled by manufacturer to meet performance requirements.

Performance data shown are typical results obtained under laboratory conditions. Tests were conducted after staking studs into low carbon steel with a maximum hardness of Rockwell B70. It is recommended that each application be tested individually for precise values. For performance in materials other than steel, individual testing is a requirement. This data is not to be considered a specification.


Contact a STANLEY Engineered Fastening application specialist for design assistance.

Thread Size*	øC ± .010	D ± .005	E ref.	Material Thickness min.	Recommended Hole Size		Approx. Staking Force Tons	Approx. Pushout lbs	Approx. Unsupported Torsional Resistance in.lbs
					min.	max.			
#8	.350	.060	.060	.036 (20 Ga)	.178	.182	1.6	205	45
			.095	.060 (16 Ga)					
#10	.370	.070	.060	.036 (20 Ga)	.206	.210	2.0	255	70
			.095	.060 (16 Ga)					
1/4"	.470	.090	.060	.036 (20 Ga)	.272	.276	3.0	280	85
			.095	.060 (16 Ga)					
			.135	.090 (13 Ga)					
5/16"	.600	.110	.095	.060 (16 Ga)	.333	.337	3.9	695	290
			.135	.090 (13 Ga)					
			.180	.120 (11 Ga)					
3/8"	.690	.130	.135	.090 (13 Ga)	.400	.404	6.3	1440	490
			.180	.120 (11 Ga)					
1/2"	.950	.175	.135	.090 (13 Ga)	.533	.536	6.0	1750	740
			.180	.120 (11 Ga)					

all dimensions in inch *Other sizes not shown may be available on request.

Octelok® Clinch Stud Staking Die - Dimensional Data


Material: D2 or equivalent
Heat treat: Rc 56-60

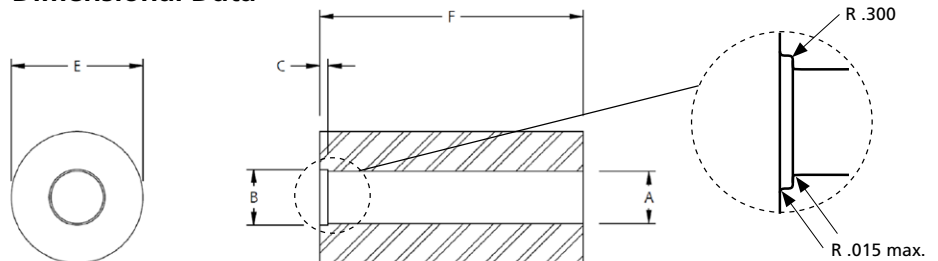

Thread Size	A ± .001	B ± .001	C ± .005	E + .000 / - .002	F ± .005
#8	.168	.182	.050	.750	2.000
#10	.194	.210	.060		
1/4"	.254	.276	.070	1.000	
5/16"	.317	.337			
3/8"	.379	.404	.080	1.250	
1/2"	.504	.536			

all dimensions in inch

Octolok® Nuts Dimensional & Performance Data

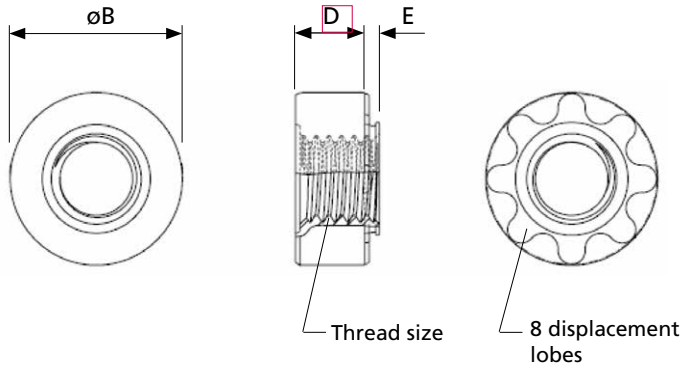

Material: Carbon steel SAE J995
Surface: as required

Underhead shape and dimensions controlled by manufacturer to meet performance requirements.

Performance data shown are typical results obtained under laboratory conditions. Tests were conducted after staking nuts into low carbon steel with a maximum hardness of Rockwell B70. It is recommended that each application be tested individually for precise values. For performance in materials other than steel, individual testing is a requirement. This data is not to be considered a specification.

Contact a STANLEY Engineered Fastening application specialist for design assistance.

Thread Size*	øB ± .005	D + .015 - .000	E max.	Material Thickness		Recommended Hole Size		Approx. Staking Force Tons	Approx. Pushout lbs	Approx. Unsupported Torsional Resistance in.lbs
				min.	max.	min.	max.			
#8	.400	.118	.060	.060 (16 Ga)	.283	.287	1.5	280	80	
#10	.445	.157	.060	.060 (16 Ga)	.302	.306	3.0	305	145	
			.075	.075 (14 Ga)			3.4	645	195	
1/4"	.555	.178	.060	.060 (16 Ga)	.341	.345	4.4	255	145	
			.075	.075 (14 Ga)			4.5	410	215	
			.090	.090 (13 Ga)			4.8	750	295	
5/16"	.655	.226	.060	.060 (16 Ga)	.420	.424	5.0	625	335	
			.075	.075 (14 Ga)			5.5	810	400	
			.090	.090 (13 Ga)			6.5	885	470	
3/8"	.725	.276	.090	.090 (13 Ga)	.518	.522	6.0	905	550	
			.134	.134 (10 Ga)			6.5	965	625	
1/2"	.940	.371	.090	.090 (13 Ga)	.617	.621	12.2	770	715	
			.134	.134 (10 Ga)			12.3	1195	820	


all dimensions in inch *Other sizes not shown may be available on request.

Octolok® Clinch Nut Staking Die - Dimensional Data

Material except for spring: D2 or equivalent
Heat treat: Rc 56-60

Thread Size	A ref.	B ref.	C ± .005	D ± .0012
#8	.128	.269	.060	.750
#10	.143	.290		
1/4"	.194	.328	.090	1.250
5/16"	.250	.407		
3/8"	.305	.507	.134	1.250
1/2"	.415	.604		

all dimensions in inch

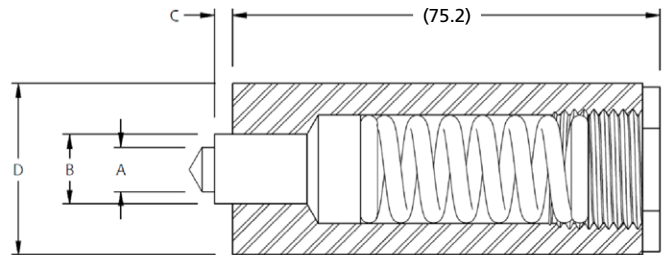

STANLEY
Engineered Fastening

www.StanleyEngineeredFastening.com

© 2015 Stanley Black & Decker, Inc., Rev. 07.2015

iForm®, and Octolok® are registered trademarks of Infastech Intellectual Properties Pte Ltd.

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy. Your local STANLEY Engineered Fastening representative is at your disposal should you need to confirm latest information.

Decorah Operations
1304 Kerr Drive
Decorah, IA 52101-2494
Tel. +1 800 544 6117
info-USA@sbdinc.com